


STANDARD DOWNHOLE MOTORS

Help reduce non-productive time service costs with Moog Standard Downhole Motors

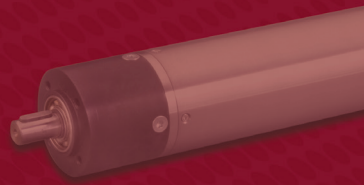

STANDARD DOWNHOLE BRUSHLESS SERVO MOTORS

Reduce your new downhole tool development time, shorten time to market, and increase productivity with our Standard Downhole Motors. Available in a variety of sizes with standard configurations, you can develop a highly reliable drilling tool equipped to stand up to high environmental pressures (1,723 bar/25,000 PSI) and max winding temperatures (220° C/ 425° F). All motors are encased in a shock and vibration resistant housing for maximum durability and equipment life.

Six standard motors are available in sizes 8 to 28:

MOTOR SIZE	8	10	16	19	23	28
Outer Diameter mm (in)	21.9 (.862)	26 (1.02)	42 (1.65)	49 (1.93)	60 (2.36)	73 (2.88)
Continuous Output Power Wattage	48	60	500	1,040	1,500	2,500
Operating Terminal Peak Voltage	48	48	100	100	650	650

ADVANTAGES

- Brushless motors capable of operating in severe duty HPHT downhole service tool environments including temperature, shock, vibration, pressure, fluid filled environments, and more
- Proven downhole brushless motor technologies with Moog downhole application knowledge, experience and support
- Accelerate your return on investment (ROI) on projects with our proven and tested designs. By standardizing our products, we are integrating the best of our downhole technology, honed over 35 years of industry experience, into a ready-to-use product. This standardization is a testament to our commitment to quality and innovation, reflecting our rich pedigree in the industry. We believe it's crucial for our valued clients to understand the depth of expertise and experience that goes into each of our products
- Family of Standard Downhole Motors is compatible with our low and high voltage controllers.




SIZE 10 MOTOR

Outside Diameter: 26 mm (1.02 in)
 Continuous Output Power: Up to 60 Watts
 Operating Terminal Peak: 48 Volts


Optional Gearbox Length (L1) [mm (in)]	Continuous Rated Torque [N-m (lbf-in)]	Gear Ratio Options [XX:1]
28 (1.102)	0.6 (5.31)	3.5, 4.33
36 (1.417)	2 (17.7)	12.25, 18.78, 26, 33.22
44 (1.732)	3 (26.55)	81.37, 112.67, 143.97, 199.33

PRODUCT DIMENSIONS

Motor with Gearbox

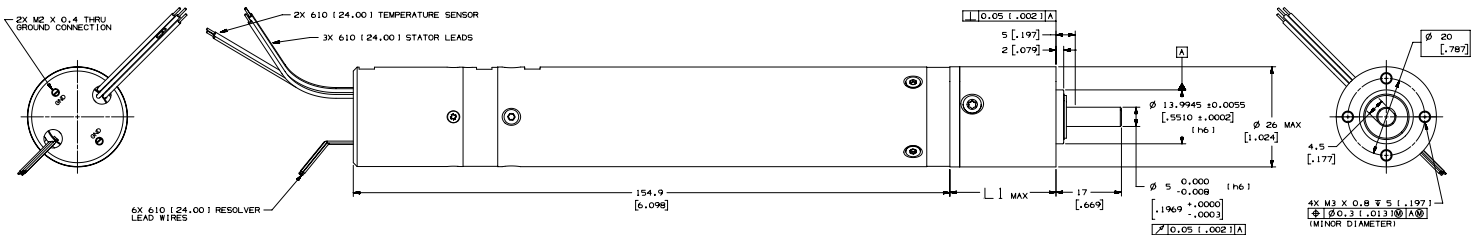


Motor without Gearbox

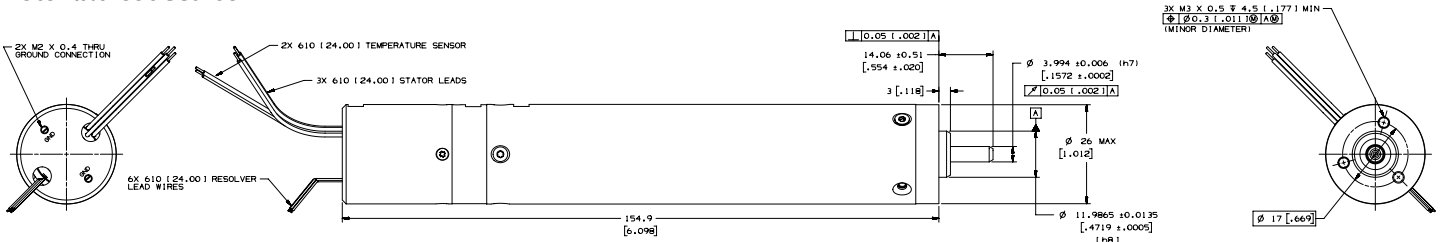

Dimensions: mm (in.)

PERFORMANCE CURVE (175° C)

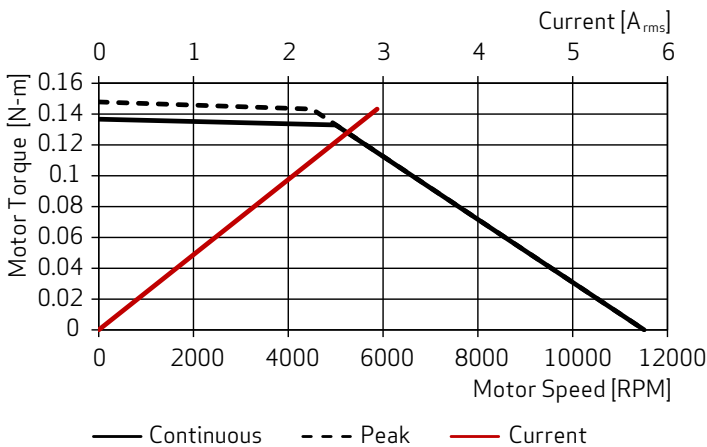

Operating Environment: Motor fully immersed in synthetic lubrication oil at 25,000 PSI (1,723 Bar) pressure and up to ambient temperature of 175° C (347° F).

All components inside the motor are designed to withstand the 220° C (428° F) maximum winding temperature.

TECHNICAL DATA


SIZE 16 MOTOR

Outside Diameter: 42 mm (1.65 in)
 Continuous Output Power: Up to 500 Watts
 Operating Terminal Peak: 100 Volts


Optional Gearbox Length (L1) [mm (in)]	Continuous Rated Torque [N-m (lbf-in)]	Gear Ratio Options [XX:1]
43 (1.692)	1.4 (12.39)	3.5, 4, 5
55.5 (2.185)	8 (70.81)	8, 12.25, 14, 16, 20, 24, 25, 30, 30.67, 38.33
68 (2.677)	15 (132.76)	49, 56, 64, 70, 80, 100, 120, 144, 184, 235.11, 293.89

PRODUCT DIMENSIONS

Motor with Gearbox

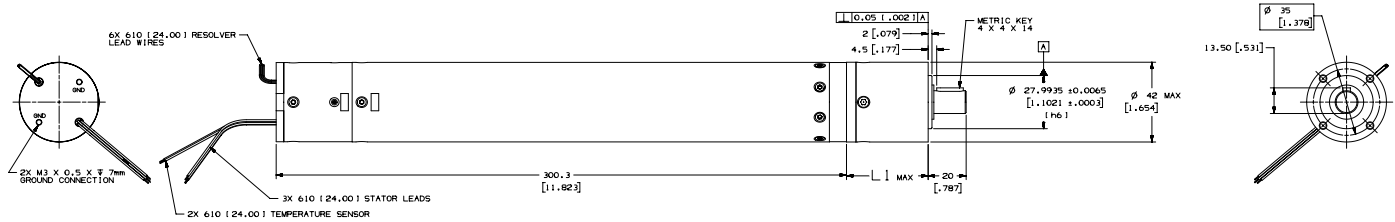


Motor without Gearbox

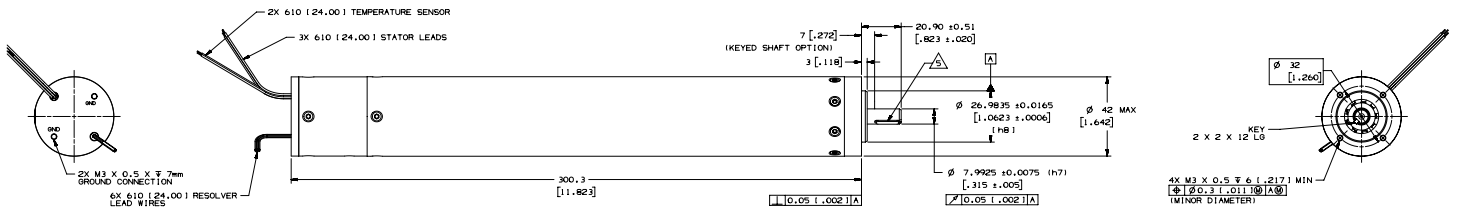

Dimensions: mm (in.)

PERFORMANCE CURVE (175° C)

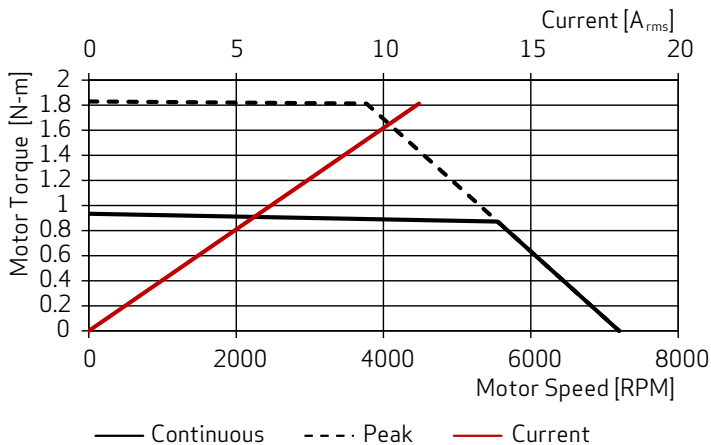

Operating Environment: Motor fully immersed in synthetic lubrication oil at 25,000 PSI (1,723 Bar) pressure and up to ambient temperature of 175° C (347° F).

All components inside the motor are designed to withstand the 220° C (428° F) maximum winding temperature.


SIZE 19 MOTOR

Outside Diameter: 49 mm (1.93 in)
 Continuous Output Power: Up to 1,040 Watts
 Operating Terminal Peak: 100 Volts


Optional Gearbox Length (L1) [mm (in)]	Continuous Rated Torque [N-m (lbf-in)]	Gear Ratio Options [XX:1]
43 (1.692)	1.4 (12.39)	3.5, 4, 5
55.5 (2.185)	8 (70.80)	8, 12.25, 14, 16, 20, 24, 25, 30, 30.67, 38.33
68 (2.677)	15 (132.76)	49, 56, 64, 70, 80, 100, 120, 144, 184, 235.11, 293.89

PRODUCT DIMENSIONS

Motor with Gearbox

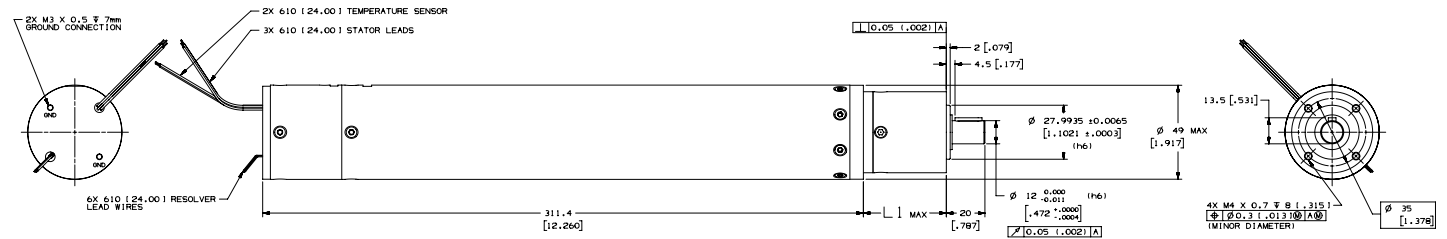


Motor without Gearbox

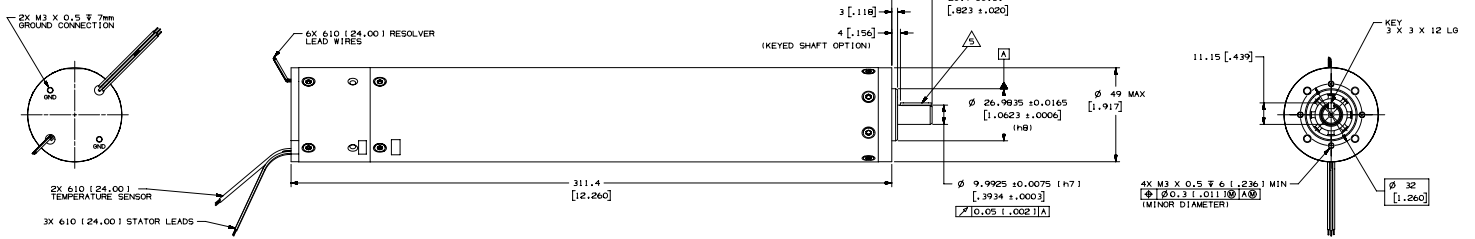

Dimensions: mm (in.)

PERFORMANCE CURVE (175° C)

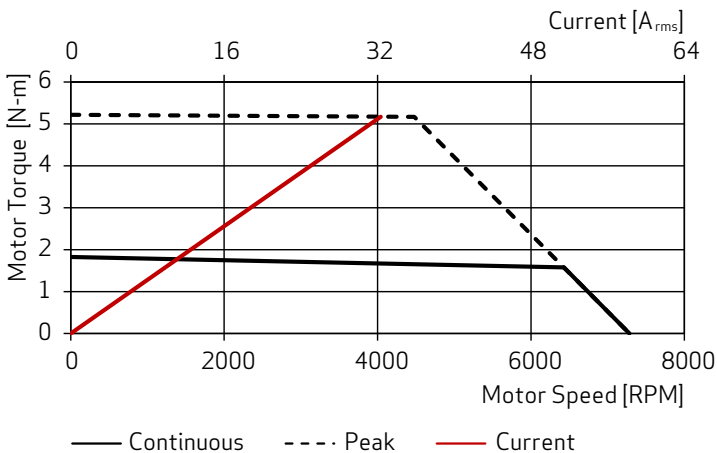

Operating Environment: Motor fully immersed in synthetic lubrication oil at 25,000 PSI (1,723 Bar) pressure and up to ambient temperature of 175° C (347° F).

All components inside the motor are designed to withstand the 220° C (428° F) maximum winding temperature.

TECHNICAL DATA

SIZE 23 MOTOR

Outside Diameter: 60 mm (2.36 in)


Continuous Output Power: Up to 1,500 Watts

Operating Terminal Peak: 650 Volts


Optional Gearbox Length (L1) [mm (in)]	Continuous Rated Torque [N-m (lbf-in)]	Gear Ratio Options [XX:1]
45.5 (1.791)	3 (26.55)	4, 4.5, 5.2, 8
60 (2.362)	15 (132.76)	12.08, 16, 18, 20.8, 25, 29, 32, 36, 41.6
74.5 (2.933)	30 (265.52)	64, 72, 81, 100, 130, 144, 175.78, 200, 225, 256, 288, 332.8

PRODUCT DIMENSIONS

Motor with Gearbox

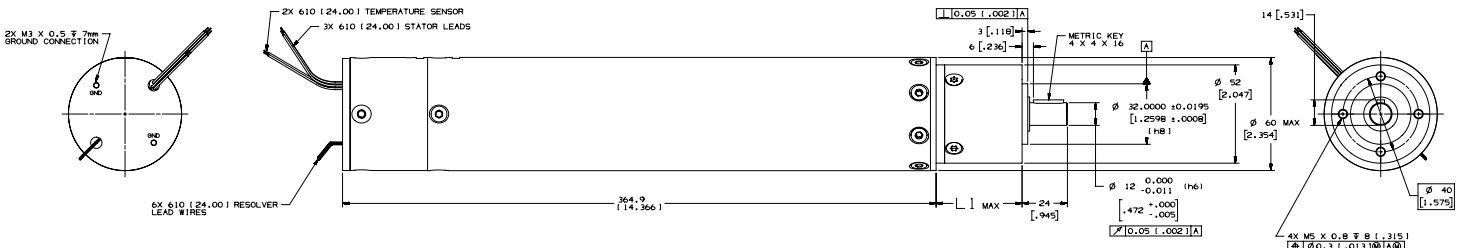


Motor without Gearbox

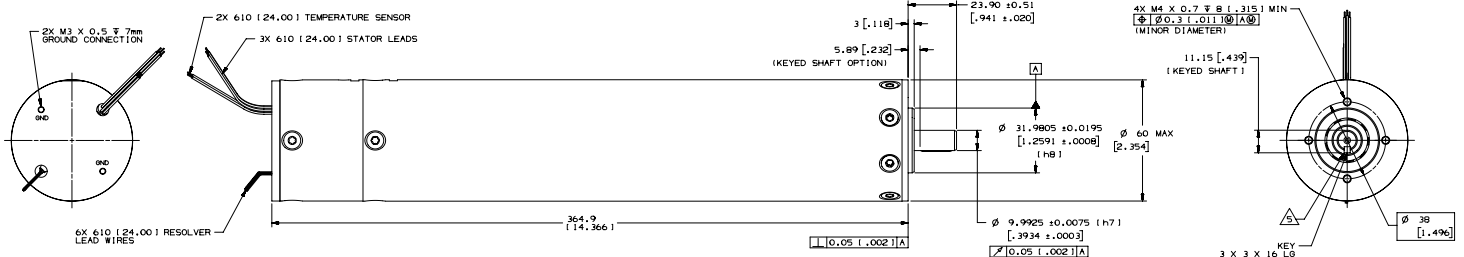

Dimensions: mm (in.)

PERFORMANCE CURVE (175° C)

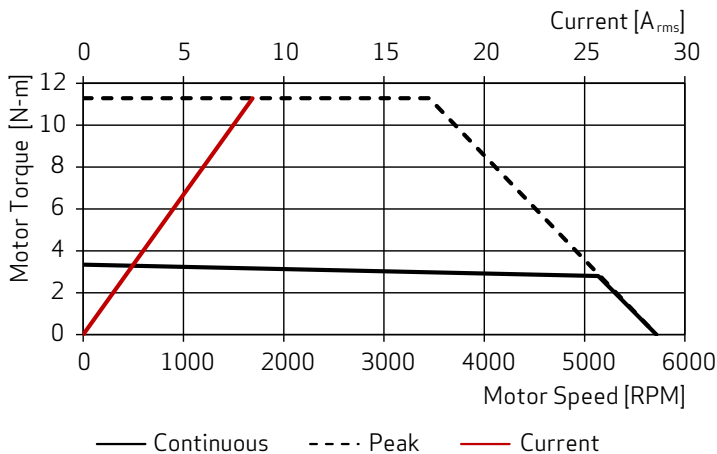

Operating Environment: Motor fully immersed in synthetic lubrication oil at 25,000 PSI (1,723 Bar) pressure and up to ambient temperature of 175° C (347° F).

All components inside the motor are designed to withstand the 220° C (428° F) maximum winding temperature.


SIZE 28 MOTOR

Outside Diameter: 73 mm (2.88 in)
 Continuous Output Power: Up to 2,500 Watts
 Operating Terminal Peak: 650 Volts


Optional Gearbox Length (L1) [mm (in)]	Continuous Rated Torque [N-m (lbf-in)]	Gear Ratio Options [XX:1]
60 (2.363)	6 (53.1)	3.5, 4, 5
78 (3.070)	30 (265.52)	12.25, 14, 16, 20, 24, 25, 30, 30.67, 38.33
96 (3.779)	38 (336.33)	49, 56, 64, 70, 80, 100, 120, 144, 184, 235.11, 293.89

PRODUCT DIMENSIONS

Motor with Gearbox

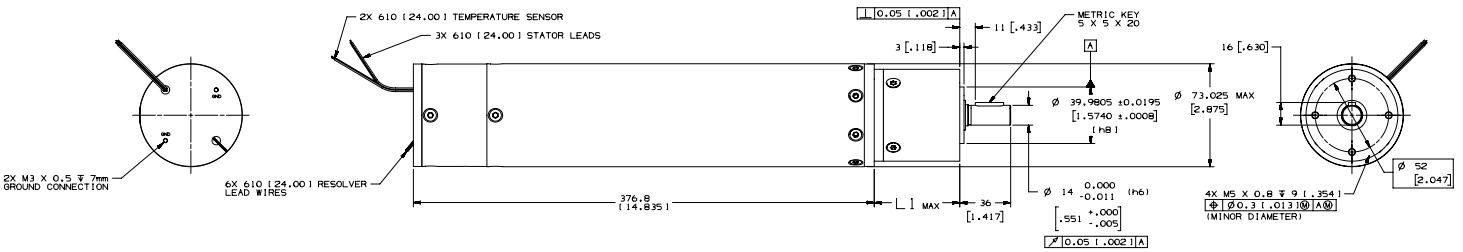


Motor without Gearbox

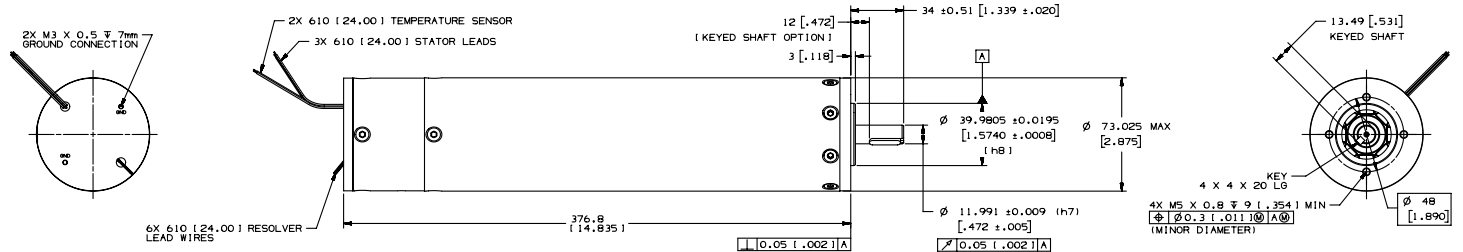

Dimensions: mm (in.)

PERFORMANCE CURVE (175° C)

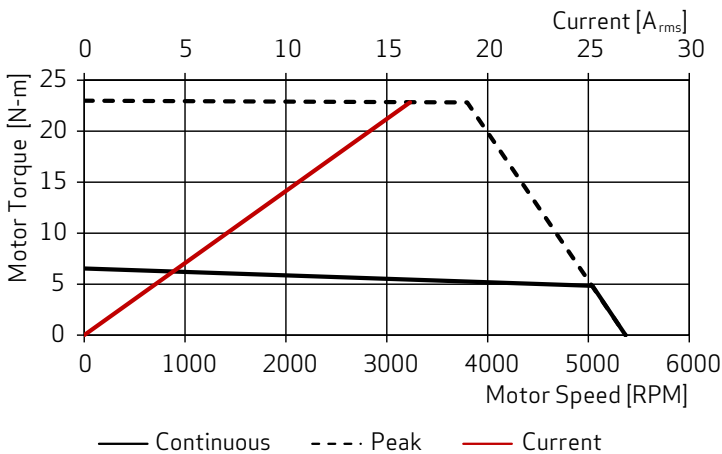

Operating Environment: Motor fully immersed in synthetic lubrication oil at 25,000 PSI (1,723 Bar) pressure and up to ambient temperature of 175° C (347° F).

All components inside the motor are designed to withstand the 220° C (428° F) maximum winding temperature.

PRODUCTS FOR TODAY'S TOUGHEST ENVIRONMENTS IN OIL & GAS EXPLORATION




Motion-control technologies are a linchpin for helping oilfield services firms precisely hit a target depth or lateral position. But designing for precision is not enough. That's because the speed and reliability of downhole equipment impacts your overall profitability.

When it comes to choosing the right products for your downhole application, rely on the extensive experience of Moog engineers. In every solution, our team brings with them decades of knowledge designing severe duty products in applications that range from heavy industry to space and defense.


MOTOR FEATURES

- Highly accurate feedback delivered via a two-pole resolver
- RTD 1000 Ω temperature sensor
- Stainless steel construction for long-life durability
- Ruggedized design to withstand extreme environments of shock, vibration, and high pressures

SIZES 10-28 WIRING DIAGRAM

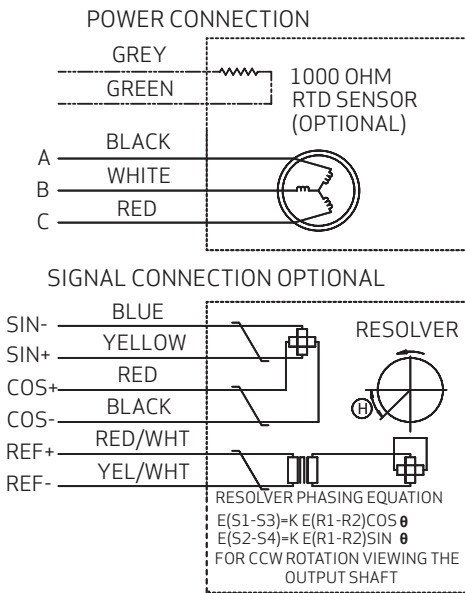

SIZE 8 MOTOR WIRING DIAGRAM

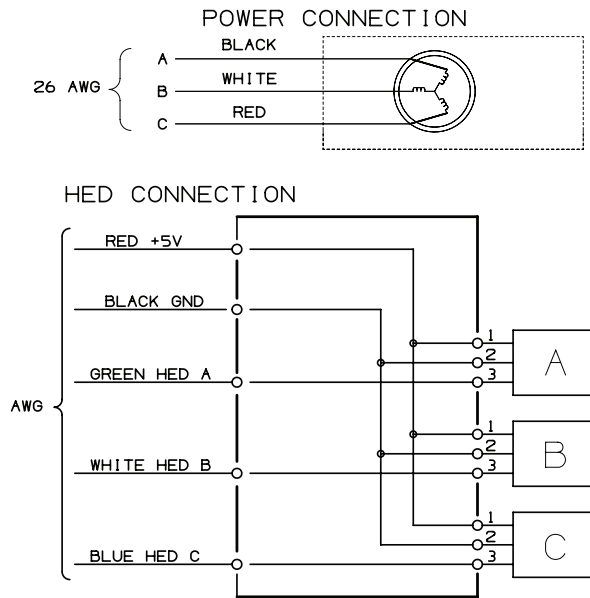

COMPATIBLE STANDARD DOWNHOLE MOTOR CONTROLLERS

Standard Motor Size	8	10	12	16	19	23	28
Position Feedback	HED	Resolver	HED	Resolver	Resolver	Resolver	Resolver
Standard Controller	Low Voltage	Low Voltage	Low Voltage	High Voltage	High Voltage	High Voltage	High Voltage

www.moog.com/industrial

Moog is a registered trademark of Moog Inc. and its subsidiaries. All trademarks as indicated herein are the property of Moog Inc. and its subsidiaries. ©2021 Moog Inc. All rights reserved. All changes are reserved.
 Standard Downhole Motors
 STS Rev. D, March 2024, Id. CDL65865

MOOG