


# Brushless DC Torque Motors

*DB / DBE Matrix™ Series Product Guide*



Photo credit to Bluefin Robotics

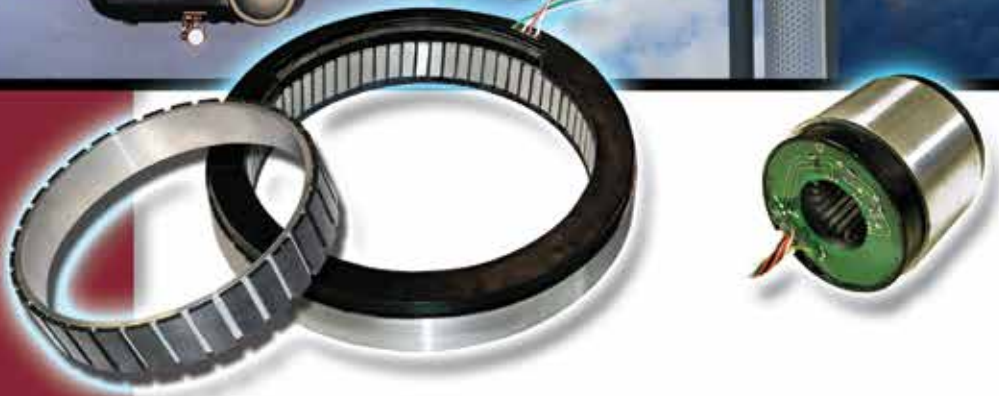

**A series of brushless DC torque motors for the most demanding applications:**

- Speed and rotation control systems
- Gimbals for FLIR and inertial navigation systems
- Stabilized gun and fire control systems for combat vehicles
- Fire control radars for land and shipboard defense
- Cockpit instrumentation for military and commercial aircraft
- Space and vacuum instruments, actuation systems and momentum wheels

**MOOG**  
COMPONENTS GROUP

# Frameless Brushless DC Torque Motors

The DB / DBE Matrix™ Series brushless torque motors are used in applications that require high power density and / or quick accelerations. The designs are optimized to minimize input power for maximum efficiency.

Utilizing high energy rare earth magnets and dense slot fills, the DB Matrix Series achieves high Km values. This provides the highest performance per volume and minimizes the motor footprint within the system. The motors are supplied as a direct drive rotor / stator frameless part set that is directly attached to the load. This form of attachment eliminates backlash and increases servo stiffness for an optimized direct drive system.

The DB / DBE Matrix Series is a family of motors consisting of a wide range of sizes, outside diameters from 1.5 to 22 inches (38 to 558.8 mm) with several stack sizes for each diameter.

Along with our standard Matrix motors, our engineers design custom solutions. If our existing models don't meet your needs, we will tailor them or provide options for a best value solution to meet your exact requirements.

## Features

- Compact
- Peak torques from 21 to over 650,000 oz-in (0.148 to 4590 N.m)
- Double insulated high temp magnet wire minimizes leakage current and provides good thermal resistance
- Stable high temp encapsulation material minimizes movement or working of windings under large temperature variations
- Rare earth magnets
- High power density
- High torque to inertia ratio
- Low speed with high accuracy
- Large through bores

## Benefits

- Operate over a wide range of speeds - not limited to AC frequency
- Extremely quiet operation with long life capability
- Motor life is not limited to brush or commutator life
- Efficient operation without losses associated with brushes

## Options

- Winding options to adjust torque sensitivity, back EMF, DC resistance for matching a variety of system requirements
- Varying stack lengths from 0.10 to over 30 inches (2.54 to 762 mm)
- Mounting flanges, hubs, mounting holes and connectors may be added as required
- Hall Effect Sensors for commutation

# Frameless Brushless DC Torque Motors

## DB / DBE Matrix Series Overview

Model Series	Peak Torque, $T_p$ oz-in (Nm)	Amps at Peak Torque, $I_p$ amps	Torque Sensitivity, $K_T$ oz-in / amp (Nm / amp)	Motor Constant $K_M$ oz-in / $\sqrt{W}$ (Nm / $\sqrt{W}$ )	Weight oz (nom) (Kg)	OD Inches (mm)	ID Inches (mm)	Length Inches (mm) Stack Length
DB-1500	21 - 212 (.15 - 1.48)	15.0	1.43 - 14.1 (.01 - .10)	2.76 - 14.66 (.02 - .10)	2.7 - 15 (.08 - .43)	1.5 (38.1)	0.250 (6.35)	0.25 - 2.5 (6.35 - 63.5)
DB-2000	34.4 - 376 (.24 - 2.63)	5.0	6.89 - 75.2 (.05 - .53)	4.75 - 25.7 (.03 - .18)	4.0 - 33 (.11 - .93)	2.0 (50.80)	0.375 (9.53)	0.25 - 3.0 (6.35 - 76.2)
DBE-2000 (with Hall Effects)	43 - 377 (.30 - 2.64)	5.0	8.60 - 75.5 (.06 - .53)	5.93 - 25.8 (.04 - .18)	4.6 - 34 (.13 - .96)	2.0 (50.80)	0.375 (9.53)	0.25 - 3.0 (6.35 - 76.2)
DB-3000	151 - 1214 (1.06 - 8.57)	10.0	15.1 - 121 (.11 - .85)	10.4 - 51.3 (.07 - .36)	8.5 - 41.0 (.24 - 1.16)	3.0 (76.2)	1.250 (31.75)	0.25 - 2.0 (6.35 - 50.8)
DB-4000	2000 - 5000 (14 - 35)	30.1	66.5 - 166.1 (.47 - 1.16)	67.2 - 129.7 (.47 - .91)	94.4 - 217.6 (2.68 - 6.17)	4.0 (101.6)	0.44 (11.18)	2.0 - 5.0 (50.8 - 127.0)
DB-5000	578 - 9024 (4.08 - 63.72)	8.0	72 - 1128 (.51 - 7.97)	22.2 - 186.0 (.16 - 1.31)	31 - 255 (.88 - 7.23)	5.0 (127.0)	2.0 (50.8)	0.25 - 4.05 (6.35 - 102.8)
DB-6000	1686 - 10083 (11.80 - 70.58)	20.0	84.3 - 504.0 (0.59 - 3.53)	80.4 - 270.0 (0.57 - 1.89)	37 - 160 (1.05 - 4.54)	6.0 (152.4)	4.0 (101.6)	0.45 - 2.95 (11.43 - 74.93)
DBE-6000 (with Hall Effects)	1686 - 10083 (11.80 - 70.58)	20.0	84.3 - 504.0 (0.59 - 3.53)	880.4 - 270.0 (0.57 - 1.89)	45 - 168 (1.26 - 4.73)	6.0 (152.4)	4.0 (101.6)	0.45 - 2.95 (11.43 - 74.93)
DB-8000	3619 - 17979 (25.33 - 125.85)	14.6	250.0 - 1223.0 (1.75 - 8.56)	149.0 - 456.0 (1.04 - 3.19)	83.2 - 328 (2.36 - 9.28)	8.0 (203.2)	5.0 (127)	0.5 - 2.5 (12.7 - 63.5)
DBE-8000 (with Hall Effects)	3619 - 17979 (25.33 - 125.85)	14.5	250.0 - 1223.0 (1.75 - 8.56)	149.0 - 456.0 (1.04 - 3.19)	83.2 - 328 (2.36 - 9.28)	8.0 (203.2)	5.0 (127)	0.5 - 2.5 (12.7 - 63.5)
DB-9000	5102 - 30665 (35.71 - 214.66)	20.0	255.0 - 1533.0 (1.79 - 10.73)	176.0 - 636.0 (1.23 - 4.45)	75.0 - 357.0 (2.12 - 10.10)	9.0 (228.6)	6.375 (161.93)	1.6 - 2.95 (40.64 - 74.93)
DB-14540	21674 - 108319 (151.72 - 758.23)	34.0	639.0 - 3149.0 (4.47 - 22.04)	324.0 - 1142.0 (2.27 - 7.99)	171.0 - 720.0 (4.84 - 20.38)	14.540 (369.32)	11.46 (291.08)	0.5 - 2.5 (12.7 - 63.5)
DB-22000	102660 - 678689 (725 - 4793)	40.0	2573 - 16974 (18.17 - 119.87)	1218 - 4743 (8.60 - 33.49)	768 - 3968 (21.5 - 111.1)	22.0 (559)	17.50 (445)	1.00 - 7.00 (25.4 - 177.8)

**Americas**

Moog Components Group  
1213 North Main Street  
Blacksburg, VA 24060  
United States

Tel: +1 540-552-3011  
Fax: +1 540-557-6400

**Asia-Pacific**

Moog Components Group  
Yokohama Nishiguchi KN Bldg. 10F  
2-8-4 Kitasaiwai, Nishi-ku  
Yokohama, Kanagawa 220-0004  
Japan

Tel: +81 45-328-1803  
Fax: +81 45-328-1801

**Europe**

Moog Components Group  
30 Suttons Business Park  
Reading, Berkshire RG6 1AW  
United Kingdom

Tel: +44 (0) 118-966-6044  
Fax: +44 (0) 118-966-6524

**MOOG**  
COMPONENTS GROUP

[www.moog.com/components](http://www.moog.com/components)

Email: [mcg@moog.com](mailto:mcg@moog.com)