

## **MSA70D DIGITAL SINGLE AXIS 70A OPEN FRAME MOTOR CONTROLLER**



This robust digital low voltage single axis controller is designed to provide torque, velocity and position loop closure. It has a CAN Bus command interface and also can receive an analog command signal. An open frame design with cold plate mount is used to reduce the overall cost and to allow this controller to be easily incorporated into existing vehicle electronics. The advanced space vector algorithms provide optimum performance for new or existing motors to provide superior power densities. There is also a control power


input option that replaces the +/-15V, and 5V supplies with 28V. Additionally, there are a wide range of end user programmable software features, as listed below.



- Extensive built in test
- End-damping limits
- Acceleration limits

- Field weakening
- Joystick shaping function
- Comprehensive loop tuning Analog and digital I/O
- Tracking/Stabilization Modes Status and fault history

  - Data logging

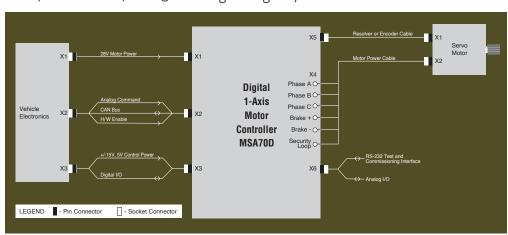










## MSA70D DIGITAL SINGLE AXIS 70A OPEN FRAME MOTOR CONTROLLER

SPECIFICATIONS	
Parameter	Performance
Power Supply	18Vdc - 32Vdc
Temperature (Baseplate)	-40°C to 85°C
Command Communication Interfaces	CAN-Bus
Weight	0.5kg (1.1lbs)
Position Sensor Interface	SSI, BISS or EnDat Serial Interfaces
Motor Commutation Sensor	Resolver or Encoder
Envelope	110 x 82 x 61.3mm (4.3 in. x 3.2 x 2.4in)
Self Protection	Over-Temperature and Over-Current
Output Current	70A Peak

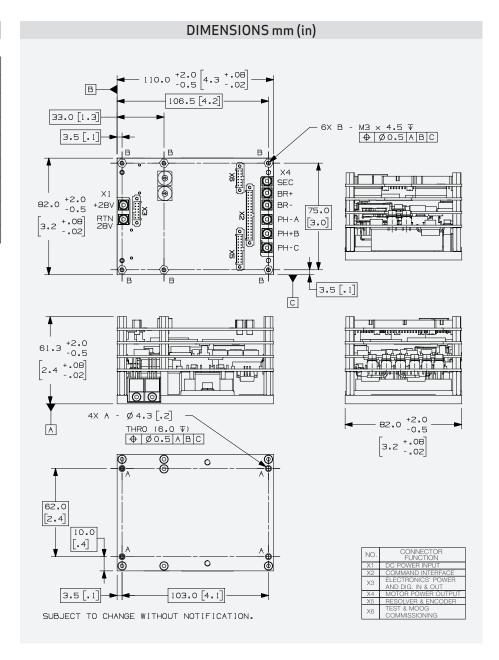



East Aurora, NY 14052 USA +1.716.652.2000 www.moog.com









