

Silencer[®] Series Brushless DC Motor

TYPICAL APPLICATIONS

- Commercial and military aerospace
- Computer-controlled embroidery machines
- Scanners
- Packaging equipment and printing products
- HVAC equipment (air moving)
- Robotics
- Semiconductor handling and insertion machines
- Actuators
- Factory automation
- Fuel cells

FEATURES

- Inside rotor construction for quick acceleration
- 8 pole motor
- Compact size, 3.5 inches long
- Diameter size, 3.4 inches
- Continuous torque up to 310 oz-in
- High energy sintered neodymium magnets
- Safe, arcless operation
- High torque per dollar ratio
- Unique stator construction - optimal copper slot fill for high motor constant (Km)

BENEFITS

- Operation at any single speed - not limited to AC frequency
- Motor life is not limited to brush or commutator life
- An essentially linear speed / torque curve
- Efficient operation without losses associated with brushes and commutation or armature induction
- Precise, variable speed control
- Extremely quiet operation
- Long-life operation
- High performance in a compact package

BSG34 High Performance Unique Stator Design



Quiet, Brushless Motors

Utilizing high energy sintered neodymium magnets and a unique stator design, the BSG34 brushless motor offers over two times the torque capability of our standard BN34 brushless motor. Ideal for applications where maximum performance and compact size are critical. Designed for maximum efficiency, this motor is a viable alternative to costly traditional brushless DC servo motors.

Typical options include electronic drives, encoders, gearheads, as well as Hall effect, resolvers, sensorless feedback and black finned aluminum housing (for additional heat transfer).


For more information about how this product can be tailored to fit your specific application, contact our applications engineers.

MOOG
COMPONENTS GROUP

Brushless Motors

SPECIFICATION AND NUMBERING SYSTEM


Part Numbering System Guide

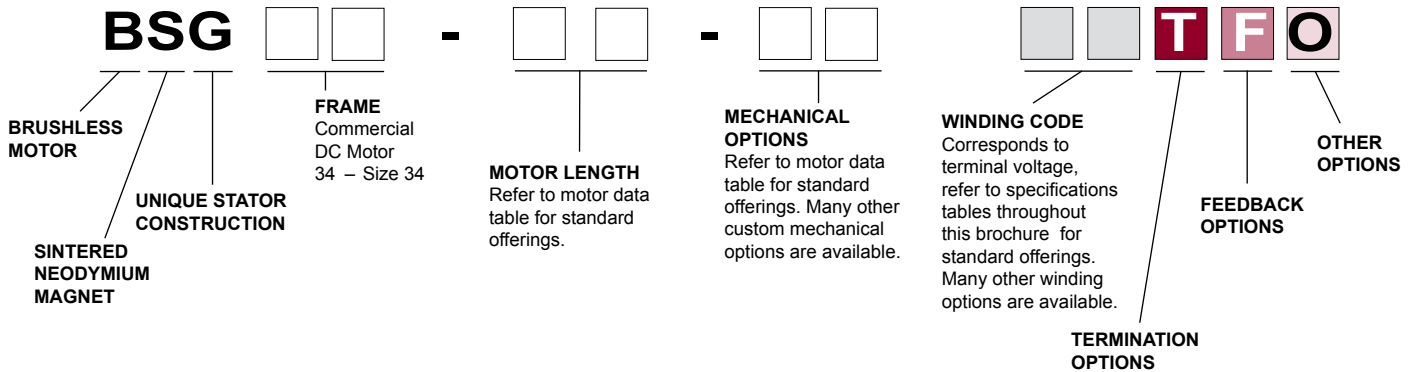


BSG34-35 SPECIFICATIONS - *Continuous Stall Torque 326 oz-in (2.3 Nm)* *Peak Torque 1600 oz-in (11.29 Nm)*

Part Number*		BSG34-35AA- <input type="text"/> <input type="text"/> T F <input type="text"/>		
Winding Code**		01	02	03
L = Length	inches	3.50		
	millimeters	88.90		
Terminal Voltage	volts DC	24	48	170
Peak Torque	oz-in	1325	1600	1350
	Nm	9.35	11.29	9.53
Continuous Stall Torque	oz-in	270	326	275
	Nm	1.90	2.30	1.94
Rated Speed	RPM	3280	4000	7380
	rad/sec	343.4	418.8	772.6
Rated Torque	oz-in	265	320	270
	Nm	1.87	2.25	1.90
Rated Current	Amps	30.7	22.4	9.5
Rated Power	watts	642.90	946.75	1473.82
Torque Sensitivity	oz-in/amp	9.13	15.15	30.44
	Nm/amp	0.06	0.11	0.21
Back EMF	volts/KRPM	6.75	11.20	22.51
	volts/rad/sec	0.06	0.11	0.21
Terminal Resistance	ohms	0.04	0.07	0.26
Terminal Inductance	mH	0.16	0.44	1.75
Motor Constant	oz-in/sq.rt.watt	45.65	56.07	59.36
	Nm/sq.rt.watt	0.32	0.40	0.42
Rotor Inertia	oz-in-sec ² x10 ⁻³	14.80	14.80	14.80
	g-cm ²	1045.18	1045.18	1045.18
Weight	oz	72	72	72
	g	2041.2	2041.2	2041.2
# of Poles		8	8	8
Timing		120°	120°	120°
Mech. Time Constant	ms	0.27	0.18	0.16
Electrical Time Constant	ms	3.95	6.03	6.65
Thermal Resistivity	deg. C/watt	1.40	1.40	1.40
Speed/Torque Gradient	rpm/oz-in	1.0	0.9	0.6
No Load	rpm	3535	4271	7540

Timing Diagram for Hall Switches

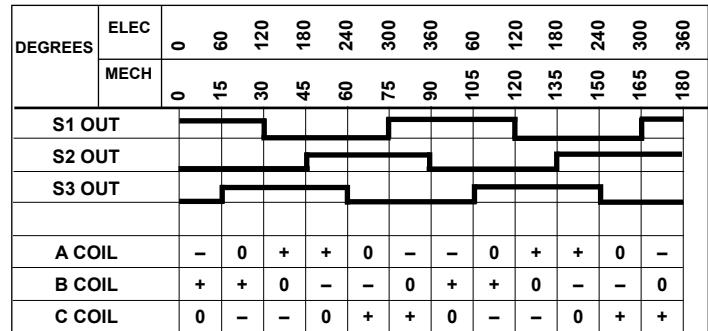

Hall Effect Switches

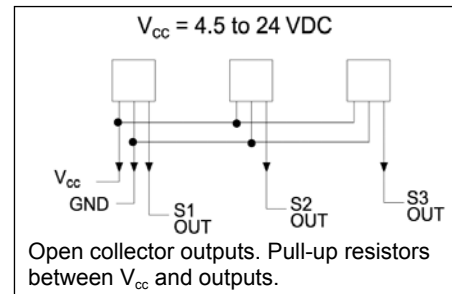

Notes:

- Motor mounted to a 4" x 4" x 1/4" aluminum plate, still air.
- Maximum winding temperature of 155°C.
- Typical electrical specifications at 25°C.
- Motor Terminal Voltages are representative only; motors may be operated at voltages other than those listed in the table. For assistance please contact our applications engineer.
- Calculated (theoretical) speed/torque gradient.


*Many other custom mechanical options are available – consult factory.

**Many other winding options are available – consult factory.

Select your options below and place their code in its corresponding block as shown above.

- | | | |
|--|---|--|
| <input checked="" type="checkbox"/> TERMINATION | <input checked="" type="checkbox"/> FEEDBACK OPTIONS | <input checked="" type="checkbox"/> OTHER OPTIONS |
| L – Leads (std) | H – Hall Effect (std) | D – Drive |
| C – Connector | R – Resolver | G – Gearhead |
| M – MS connector | S – Sensorless | E – Encoder |


BSG34 Typical Outline

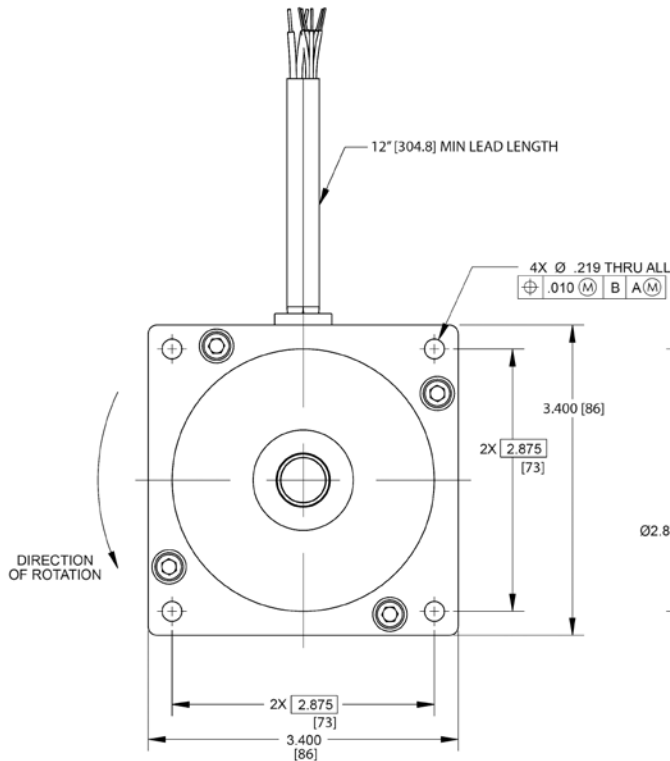

Termination Table*

CONNECTION	LEAD COLOR
V _{cc}	YELLOW
GROUND	GRAY
A COIL	RED
B COIL	BLACK
C COIL	GREEN
S1 OUT	BROWN
S2 OUT	BLUE
S3 OUT	ORANGE


*We reserve the right to use solid color wires or white wires with color trace.

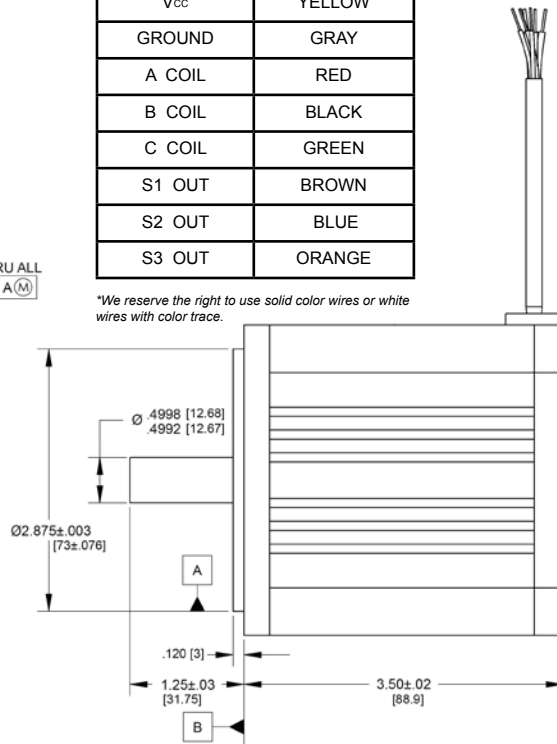


Dimensions are in inches [mm]

BSG34 Performance Curves


BSG34-35AA-01LH: Continuous & Intermittent Operation at 24 Volt DC

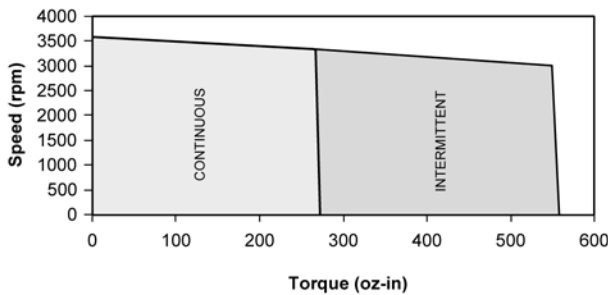

BSG34-35AA-02LH: Continuous & Intermittent Operation at 48 Volt DC

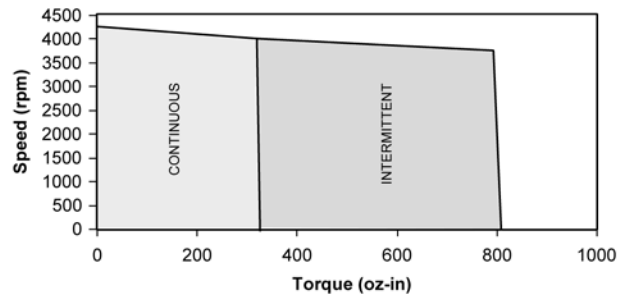

BSG34-35AA-03LH: Continuous & Intermittent Operation at 170 Volt DC

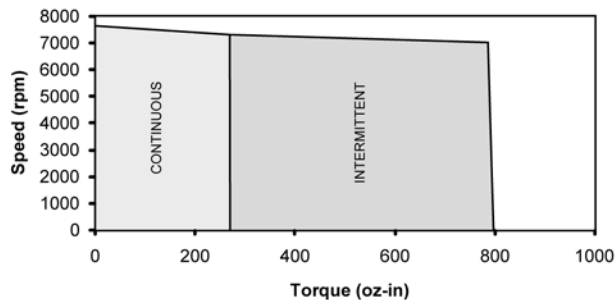

Note: Intermittent operation is based on a 20% duty cycle of one minute on, four minutes off. Please contact the factory regarding the duty cycle of your application.

Specifications and information are subject to change without prior notice.
© 2009 Moog Inc. MS3025 3/09

Americas

Moog Components Group
1213 North Main Street
Blacksburg, VA 24060
United States

Tel: 540-552-3011
Fax: 540-557-6400

U.K. and Ireland

Moog Components Group
30 Suttons Business Park
Reading, Berkshire RG6 1AW
England

Tel: +44 (0) 118-966-6044
Fax: +44 (0) 118-966-6524

Europe

Moog GmbH
Hanns-Klemm-Strasse 28
71034 Boeblingen
Germany

Tel: +49 7031-622-0
Fax: +49 7031-622-100

Asia-Pacific

Moog Japan Ltd.
1-8-37 Nishi-Shindo
Hiratsuka Kanagawa
Japan 254-0019

Tel: +81 463-55-3615
Fax: +81 463-54-4709

MOOG
COMPONENTS GROUP

www.moog.com/components

Email: mcg@moog.com