


# G128-809A

## POWER SUPPLY

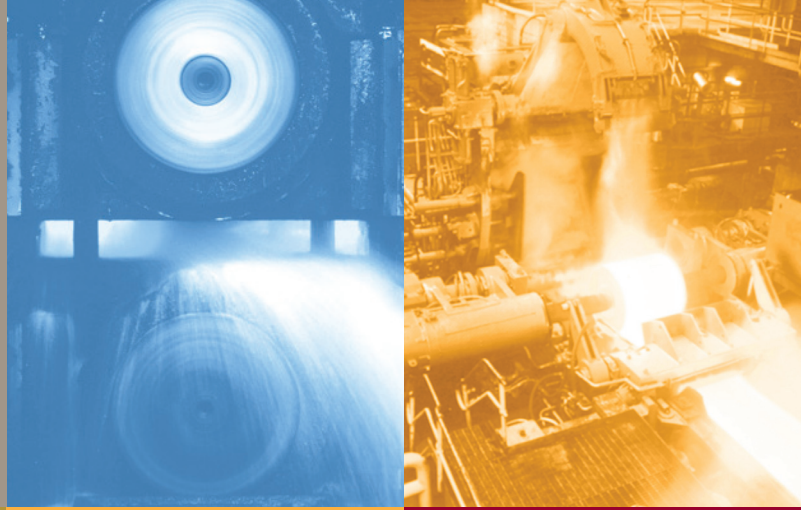

### DESCRIPTION

The G128-809A Power Supply provides a regulated 24VDC output from an AC or DC input supply. The G128-809A is suitable for powering devices with a combined continuous current of up to 2.9A at 40°C.

The Power Supply uses a high reliability and efficient switching regulator design and is housed in a compact DIN rail mounting enclosure.

### FEATURES

- Wide range AC or DC input
- Regulated +24VDC low ripple output
- Idle proof and short circuit protected
- 4kV isolation from input supply
- High efficiency, >80%
- High reliability, 500,000 hour MTBF
- Parallel connectable for redundant operation
- Compact DIN housing
- CE marked

