


By-pass module E554 Series

PDS E554 11.89

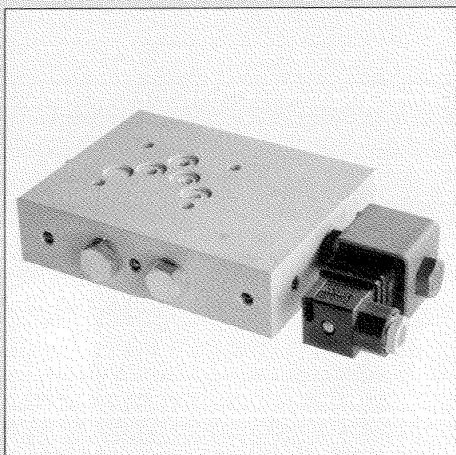

Features

- Fits under 63I & 64I Series valves
- By-passes servovalve
- Causes actuator to extend, retract or float
- Suitable for 4 or 5 port valves
- Fail-safe design for dirt resistance
- Optional coil voltages
- Port pattern: CETOP 5

Typical applications


Where an actuator piston must retract when the servoloop is disconnected, the module may be configured so that, say J_2 is connected to P and J_1 to R.

Where an actuator piston must extend when the servoloop is disconnected, the module may be configured so that, say J_2 is connected to R and J_1 to P.

Where an external mechanical force, such as a spring must move the actuator when the servoloop is disconnected, the module may be configured so that both J_1 and J_2 are connected to R.

Where external hydraulic force, derived from say, a 4-way solenoid, must move the actuator when the servoloop is disconnected, the module may be configured so that J_1 and J_2 are not connected to P or R.

Description

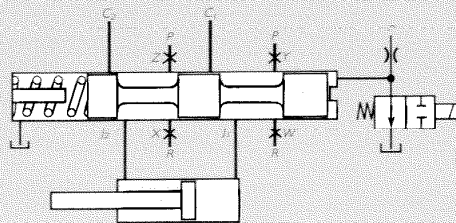

This unit contains a spring loaded spool. This spool is moved against the spring by hydraulic pressure from a solenoid and orifice. When the solenoid is energised, the spool moves against the spring, connecting the servovalve control ports, C_1 and C_2 , to their respective actuator ports J_1 and J_2 .

When the solenoid is de-energised, the spring moves the spool to block the servovalve control ports and to connect the actuator ports to their respective by-pass ports. By selecting the appropriate plugs (X, Y, W and Z) in the by-pass ports, each actuator port can be connected to either pressure or return.

The plugs are field accessible. Should it be necessary to limit speeds during by-pass, the plugs may be replaced by orifices. Because a sliding spool is used, the E554 Module should not be relied upon to lock an actuator for long periods of time.

Specification

Operating pressure, 70 to 210 bar standard. High and low pressure versions available on request.

Seal material, Buna N for petroleum based hydraulic oils, water-oil emulsions or water-glycol mixtures. Other seal materials available on request.

Coil rating, 24V DC, 500mA standard
12V DC, 1A
115V AC, 100mA optional
230V AC, 50mA

Coils are rated for continuous operation. (AC coil options incorporate full wave rectification rate at 1000 volts peak).

Connector, Hirshman.

Operating sense (standard), servovalve is by-passed when coil is de-energised.

Optional operation, servovalve is by-passed when coil is energised.


Solenoid leakage (when servovalve is by-passed),
0.4 l/min. at 70 bar supply
0.7 l/min. at 210 bar supply.

Response time, Switch on (start up function) < 200ms. Switch off (abort function) < 75ms.


Flow rating, in a 4-way configuration and normal operation, flow rating is 25 l/min with a 10 bar pressure drop.

MOOG

Installation

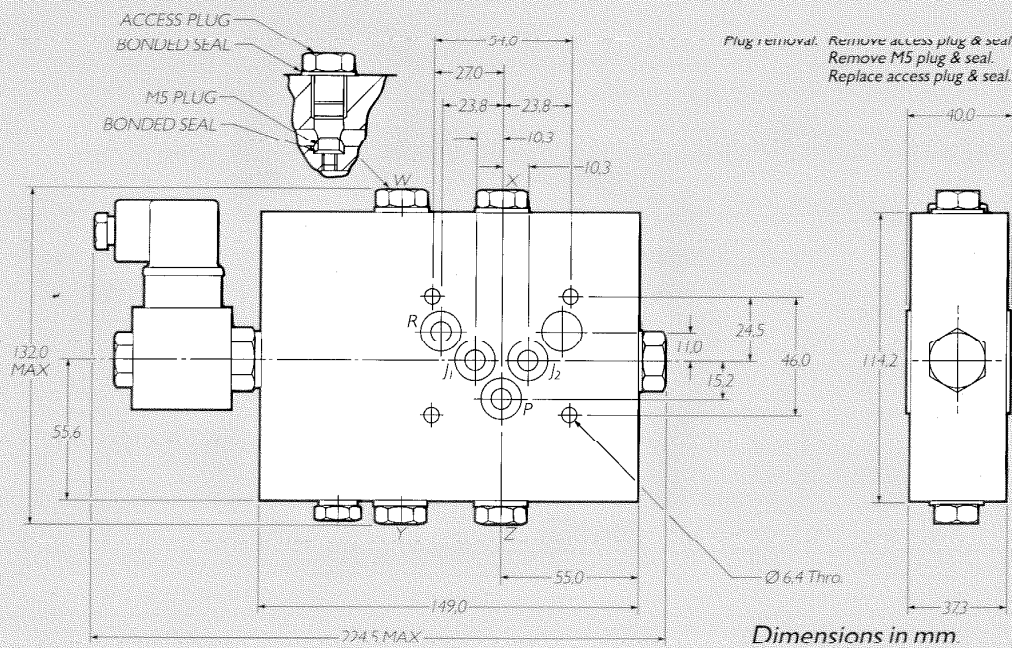

Coil wiring



AC Options only

Ports

All port O-rings Ø 2.0mm section x 12.0 mm I.D.

Ordering information

E 5 5 4 — X X X

012	— 12V DC
024	— 24V DC
115	— 115V AC
230	— 230V AC

H	— standard solenoid (without lamp)
K	— standard solenoid (with lamp)
M	— energises to bypass (without lamp)
T	— energises to bypass (with lamp)

PLUG CONFIGURATION

LETTER	PLUG W	PLUG X	PLUG Y	PLUG Z
B	REMOVED	FITTED	FITTED	REMOVED
C	FITTED	REMOVED	REMOVED	FITTED
D	REMOVED	REMOVED	FITTED	FITTED
E	ORIFICE	FITTED	FITTED	ORIFICE
F	FITTED	ORIFICE	ORIFICE	FITTED

Moog Controls Ltd pursue a policy of continuous development and reserve the right to alter designs and specifications without prior notice. Information contained herein is for guidance only and does not form part of a contract.

MOOG

Moog Controls Limited, Ashchurch, Tewkesbury
Gloucestershire, England. GL20 8NA
Telephone (0684) 296600. Telex 43229. Telefax (0684) 296760