Slip Ring Capsules (Compact)

AC7094

Fiber brush slip ring capsule

Description

A slip ring capsule can be used in any electromechanical system that requires unrestrained, intermittent or continuous rotation while transferring power and / or data. A slip ring is also called a rotary electrical joint, collector, commutator or swivel. A slip ring can improve system performance by simplifying operations and eliminating damage prone wires.


The AC7094 provides a compact 2.1 inch outside diameter. The AC7094 provides 5 amp circuits in 30, 36, 42 and 48 ring configurations. Similar in design to our very popular AC4598 and AC6200 series, this design features long life, fiber brush contact technology for ultimate performance in many challenging applications.

Features

- · Compact 2.1 inch outside diameter
- · Speeds up to 250 rpm
- · Multiple circuit configurations
- Continuous rotation of power and / or data signals
- · High-impact thermoplastic construction
- · Gold plated rings
- Available with Ethernet

Benefits

- · Transfers power, as well as analog and digital signals
- · Compatible with data bus protocols
- Fiber brush technology provides long life and maintenance free operation
- · Compact packaging

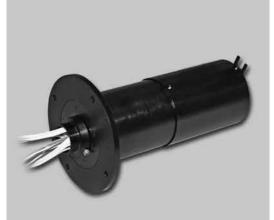

Typical Applications

- · Precision rotary equipment
- · Semiconductor handling systems
- · Industrial machinery
- Robotics

Slip Ring Capsules (Compact)


	AC7094 Specifications	Options			
Operating Speed	250 rpm*	• 24, 36 and 48 inch leads			
Number of Circuits	30, 36, 42 or 48	Longer leads available Available with Ethernet, contact factory			
Lead Length	12 inch standard				
Lead Size / Type	22 AWG				
Voltage	240 VAC				
Operating Temp.	-40°C to +80°C				
Current Rating	5 amps / circuit				
Electrical Noise	100 milliohms max.				

^{*}Please note that the operational life of the unit is dependent upon rotational speed, environment and temperature.

Wire Color Code									
Ring #	Color	Ring #	Color	Ring #	Color	Ring #	Color	Ring #	Color
1	BLK	11	WHT / BLK	21	WHT / BLK / RED	31	BLU	41	WHT / BLU
2	BRN	12	WHT / BRN	22	WHT / BLK / ORN	32	VIO	42	WHT / VIO
3	RED	13	WHT / RED	23	WHT / BLK / YEL	33	GRY	43	WHT / GRY
4	ORN	14	WHT / ORN	24	WHT / BLK / GRN	34	WHT	44	WHT / BLK / BRN
5	YEL	15	WHT / YEL	25	BLK	35	WHT / BLK	45	WHT / BLK / RED
6	GRN	16	WHT / GRN	26	BRN	36	WHT / BRN	46	WHT / BLK / ORN
7	BLU	17	WHT / BLU	27	RED	37	WHT / RED	47	WHT / BLK / YEL
8	VIO	18	WHT / VIO	28	ORN	38	WHT / ORN	48	WHT / BLK / GRN
9	GRY	19	WHT / GRY	29	YEL	39	WHT / YEL		
10	WHT	20	WHT / BLK / BRN	30	GRN	40	WHT / GRN		

Part Number	Dimension "A"				
AC7094-130	5.016 inch (127,4 mm)				
AC7094-136	5.574 (141,6)				
AC7094-142	6.132 (155,8)				
AC7094-148	6.690 (169,9)				

AC7094 Dimensions

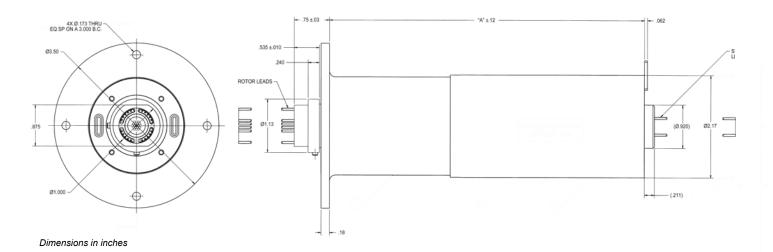

63