

Precision Planetary Gearheads

TYPICAL APPLICATIONS

- Conveyor systems
- Medical pumps
- Packaging equipment
- Machine tools
- Factory automation
- Any application requiring:
 - Speed reduction
 - Torque multiplication

FEATURES

- Fits our brush and brushless motors
- Precision manufactured in accordance with DIN EN ISO 9001 Standards
- Compact design
- High efficiency
- Suitable for continuous, reversing and intermittent operation
- Can be installed in any attitude
- Life-time lubricant for maintenance-free operation

BENEFITS

- Coaxial arrangement of input and output
- Compact design
- High efficiency
- Low moments-of-inertia
- Can be installed in any attitude
- Suitable for continuous, reversing and intermittent operation
- Low sensitivity to impact load
- Large range of ratios available

32, 52, 62, 81 and 120 mm
(1.26 - 4.72 inch) Diameter



Quiet Precision Gearheads

Moog Components Group precision gearheads, when coupled to our line of brush-type and brushless motors, provide the user with a quiet and powerful precision gearmotor. Available in a wide range of ratios and output torques, these gearmotors will meet the requirements of a vast number of applications. Life-time lubrication ensures long life and maintenance-free operation.

Our engineering department is available for consultation to help you tailor a gearmotor for your specific application.

Note: This catalog contains basic marketing information and general part descriptions of Moog Components Group product lines. With respect to the U.S. export regulations, the products described herein are controlled by the U.S. Commerce Department or the U.S. State Department. Contact Moog Components Group for additional detail on the export controls that are applicable to your part.

32 MM (1.26 INCH) DIAMETER SPECIFICATIONS

Available Ratios	# of Stages	Output Torque	Shaft Inertia (gcm ²)
4:1 (3.70:1)	One	0.75 Nm (106.2 oz - in)	1.54
4:1 (4.28:1)	One	0.75 Nm (106.2 oz - in)	1.29
5:1 (5.18:1)	One	0.75 Nm (106.2 oz - in)	1.14
7:1 (6.75:1)	One	0.75 Nm (106.2 oz - in)	0.89
14:1 (13.73:1)	Two	2.5 Nm (318.6 oz - in)	1.49
16:1 (15.88:1)	Two	2.5 Nm (318.6 oz - in)	1.25
18:1 (18.36:1)	Two	2.5 Nm (318.6 oz - in)	1.26
19:1 (19.20:1)	Two	2.5 Nm (318.6 oz - in)	1.12
22:1 (22.20:1)	Two	2.5 Nm (318.6 oz - in)	1.12
25:1 (25.01:1)	Two	2.5 Nm (318.6 oz - in)	0.96
27:1 (26.85:1)	Two	2.5 Nm (318.6 oz - in)	1.13
29:1 (28.93:1)	Two	2.5 Nm (318.6 oz - in)	0.96
35:1 (34.97:1)	Two	2.5 Nm (318.6 oz - in)	0.97
46:1 (45.56:1)	Two	2.5 Nm (318.6 oz - in)	0.98
51:1 (50.89:1)	Three	4.5 Nm (637.3 oz - in)	1.49
59:1 (58.85:1)	Three	4.5 Nm (637.3 oz - in)	1.25
68:1 (68.06:1)	Three	4.5 Nm (637.3 oz - in)	1.26
71:1 (71.16:1)	Three	4.5 Nm (637.3 oz - in)	1.12
79:1 (78.71:1)	Three	4.5 Nm (637.3 oz - in)	1.26
93:1 (92.70:1)	Three	4.5 Nm (637.3 oz - in)	0.96
95:1 (95.17:1)	Three	4.5 Nm (637.3 oz - in)	1.12
100:1 (99.50:1)	Three	4.5 Nm (637.3 oz - in)	1.13
107:1 (107.20:1)	Three	4.5 Nm (637.3 oz - in)	0.96
115:1 (115.07:1)	Three	4.5 Nm (637.3 oz - in)	1.13
124:1 (123.97:1)	Three	4.5 Nm (637.3 oz - in)	0.96
130:1 (129.62:1)	Three	4.5 Nm (637.3 oz - in)	0.97
139:1 (139.13:1)	Three	4.5 Nm (637.3 oz - in)	1.13
150:1 (149.90:1)	Three	4.5 Nm (637.3 oz - in)	0.97
169:1 (168.84:1)	Three	4.5 Nm (637.3 oz - in)	0.96
181:1 (181.24:1)	Three	4.5 Nm (637.3 oz - in)	0.97
195:1 (195.26:1)	Three	4.5 Nm (637.3 oz - in)	0.96
236:1 (236.09:1)	Three	4.5 Nm (637.3 oz - in)	0.96
308:1 (307.54:1)	Three	4.5 Nm (637.3 oz - in)	0.96




32 mm Technical Data

Parameter	Units	1-Stage	2-Stage	3-Stage
Max Input Speed	rpm	5000	5000	5000
Efficiency	%	80	75	70
Approx. Backlash (no-load, input locked)	DMS°	1.5	2.0	2.5
Radial Load	N	40	70	100
Axial Load	N	10	20	30
Max Permitted Fitting Pressure	N	120	120	120
Weight	g	160	210	260
Dimension (diameter x length)	mm	32 x 52	32 x 61.5	32 x 71
Lubrication	Grease (life-time lubrication)			
Installation Attitude	Any			
Operating Temperature	-15 to +80° C			
Direction of Rotation	Same for input and output shaft			

Gearheads

Package Dimensions

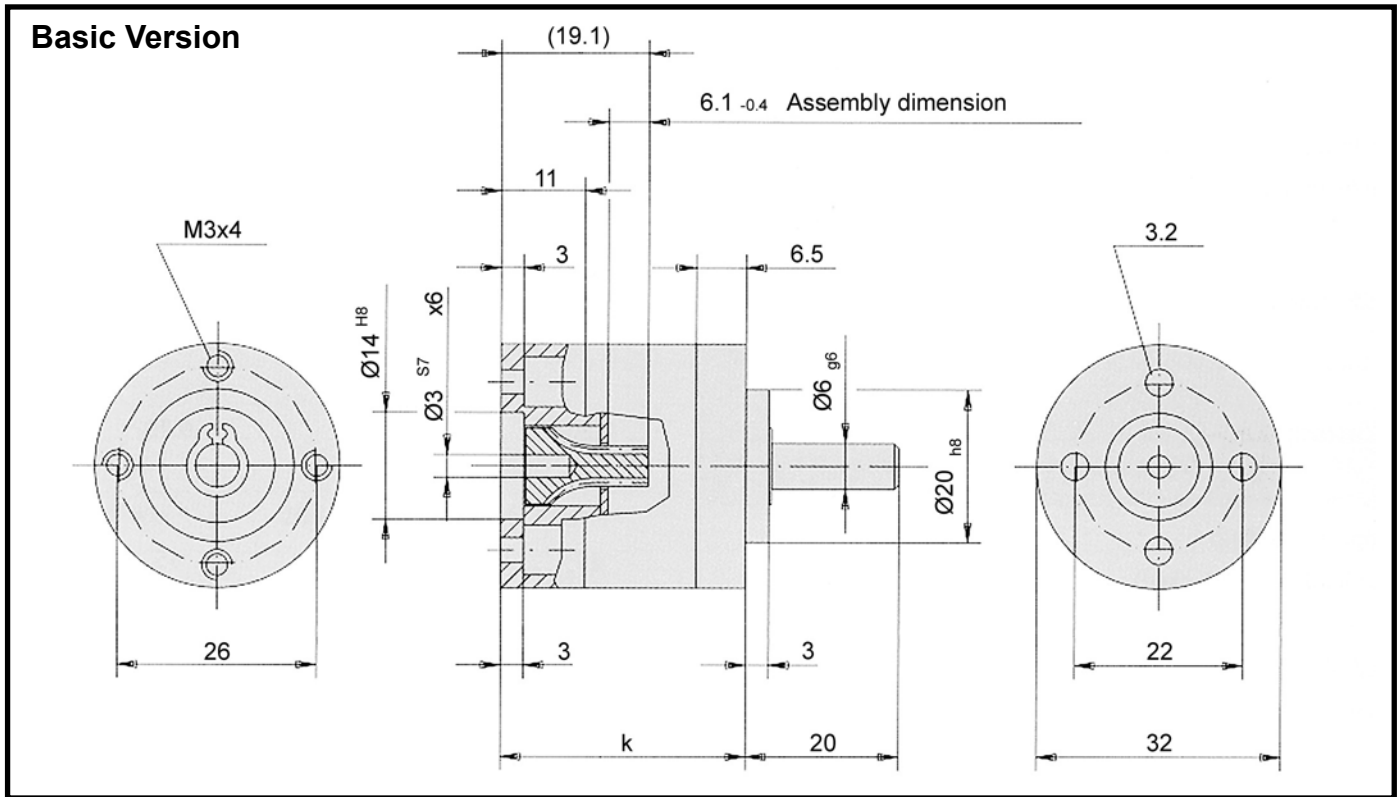


Gear Unit Length			1-Stage	2-Stage	3-Stage	4-Stage
K			32	41.5	51	60.5

We reserve the right to make technical changes.

Note: All dimension on this page are in millimeters.

32 mm Dimensional Drawings

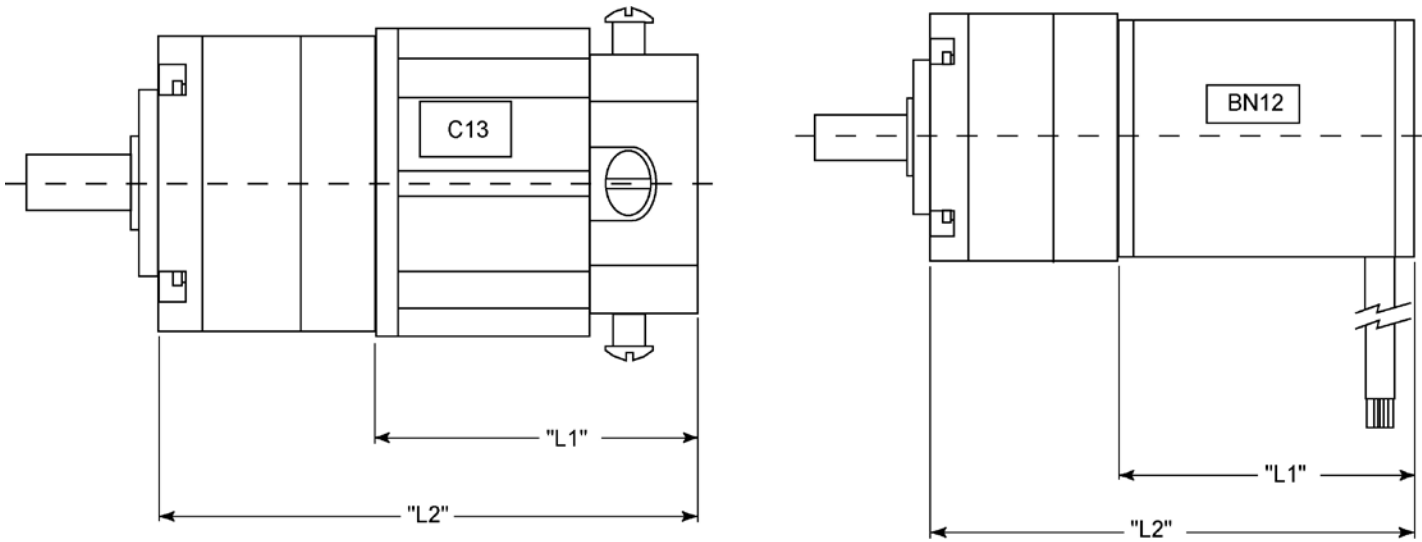

Motor + Gearhead Dimensions*

	L1 Max	L2 Max (1-Stage)	L2 Max (2-Stage)	L2 Max (3-Stage)
C13-L19	1.90 in (48.3 mm)	3.160 in (80.3 mm)	3.534 in (89.8 mm)	3.908 in (99.3 mm)
C13-L25	2.45 in (62.2 mm)	3.710 in (94.2 mm)	4.084 in (103.7 mm)	4.458 in (113.2 mm)
C13-L28	2.78 in (70.6 mm)	4.040 in (102.6 mm)	4.414 in (112.1 mm)	4.788 in (121.6 mm)
BN12-13	1.30 in (33.02 mm)	3.193 in (81.1 mm)	3.567 in (90.6 mm)	3.941 in (100.1 mm)
BN12-18	1.80 in (45.72 mm)	3.693 in (93.8 mm)	4.067 in (103.3 mm)	4.441 in (112.8 mm)
BN12-23	2.30 in (58.42 mm)	4.193 in (106.5 mm)	4.567 in (116 mm)	4.941 in (125.5 mm)
BN12-28	2.80 in (71.12 mm)	4.693 in (119.2 mm)	5.067 in (128.7 mm)	5.441 in (138.2 mm)

*All dimensions are reference dimensions

Ordering Information - Examples

32-46:1 – 32 mm gearhead, 46:1 ratio
 32-308:1 – 32 mm gearhead, 308:1 ratio