

Dagger Series

D38999 Size 19-18 Dual Port Optical Transceiver, *ELIO®, 1310nm, ARINC 818, 803 & 804

Dual Port, Flange Mount, Single Mode

FEATURES

- Compliant with ARINC 818, 803 & 804
- Suitable for Fast Ethernet or Gigabit Ethernet applications from 50Mbps to 1.5Gbps
- Maximum optical channel bit error rate less than 1×10^{-12}
- Operating temperature range from -55°C to +85°C
- Shock and vibration resistant per RTCA / D0-160E
- Electroless nickel plating meets stringent corrosion resistance specifications
- ELIO® 2.5mm ceramic optical fiber ferrule connector interface per EN 4531 and ABS 1379

APPLICATIONS

Dagger series D38999/19-18 optical transceivers enable high speed network communications over long distances in harsh environments.

- Fast or Gigabit Ethernet switches and peripherals
- Fibre Channel switches and peripherals
- ARINC 818 video interfaces
- sFPDP data links

Dagger series D38999 size 19-18 optical quad transceivers provide a rugged optical interface that is compliant with EN4531 ELIO® 2.5mm ceramic optical ferrules*.

The single mode optical fiber interface supports applications where copper cable link distance, bandwidth, weight or bulk make the use of twisted pair, twinax or quadax copper conductors unacceptable.

*ELIO® is a registered trademark of Esterline Souriau



Two duplex optical links operating from 50Mbps to 1.5Gbps

DESCRIPTION

Dagger series D38999/19-18 optical quad transmitters consist of optoelectronic transmitter and receiver functions integrated into a wall mount D38999 cylindrical connector.

The optical transmitters are 1310nm FP lasers. The transmitter input lines are driven with differential CML signals applied to the transmitter (TX+ and TX-) lines. Dual loop, temperature compensated, FP laser drivers convert the transmitter input signals to suitable laser bias and modulation currents.

The optical receivers consist of PIN and preamplifier assemblies and limiting post-amplifiers. Outputs from the receivers consist of differential CML data signals on the receiver (RX+ and RX-) lines and single ended CMOS indicator functions on the Loss of Signal (LOS) lines. The receiver data lines are squelched upon LOS assertion, preventing errant data generation when an invalid incoming optical signal is presented to the transceiver.

The optical mating interface of the Dagger series D38999/19-18 optical transceivers is an ELIO® fiber optic cable plug per EN 4531. The electrical interface to the Dagger series optical transceivers is a ribbon coax to Samtec EQCD high density cable assembly enabling SMT interconnection to a customer's backplane, motherboard or daughtercard.

Dagger series D38999/19-18 optical transceivers are vibration isolated, environmentally hardened components designed for use in harsh environment applications.

ORDERING INFORMATION

Application	Part Number
50Mbps to 1.5Gbps	P12F-4L2D-Fx-Lxxx
See Appendix A2 for more part number options	

Dagger Series D38999/19-18 ELIO Dual Port Optical Transceiver,
Single Mode, 1310nm, ARINC 664, 818, 803 & 804 Compliant

ABSOLUTE MAXIMUM RATINGS

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage Temperature	T_s	-65		+100	°C
Supply Voltage	V_{CC}	-0.5		+4.5	V

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature	T_A	-55		+85	°C
Power Supply Voltage	V_{CC}	+3.135		+3.465	V
Power Supply Noise (p-p)	N_p			200	mV

SPECIFICATIONS COMPLIANCE

Requirement	Feature	Condition	Notes
RTCA / D0-160E	ESD	Class II	2200V
RTCA / D0-160E	Vibration	3.8g ² /Hz	43G rms
RTCA / D0-160E	Shock	40.0g	6-9mS
RTCA / D0-160E	Flame Resistance	Method 1012	30 Seconds
RTCA / D0-160E	Damp Heat	10 Cycles	24 Hours
EN4531	Mating Durability	500 Cycles	<0.5dB Change
FDA / CDRH / IEC-825-1	Eye Safety	Class 1	No Safety Interlocks Required

MATERIALS

Item	Detail	Notes
D38999 Shell	Aluminum	
D38999 Shell Finish	NI, OD-CD or ZN-NI	
Interface Seal	Silicone Elastomer	
Optical Ferrules and Alignment Sleeves	Ceramic	
Printed Circuits	FR-4	

Dagger Series D38999/19-18 ELIO Dual Port Optical Transceiver,
Single Mode, 1310nm, ARINC 664, 818, 803 & 804 Compliant

TRANSMITTERS T_A = Operating Temperature Range

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Output Power	P_o	-11.5		-3.0	dBm
Optical Output Wavelength	λ_{OUT}	1285	1310	1335	nm

RECEIVERS T_A = Operating Temperature Range

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Sensitivity	P_i	-19.0		0.0	dBm
Optical Wavelength	λ_{IN}	1100		1590	nm

SUPPLY CURRENT T_A = Operating Temperature Range

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Supply Current per Port	I_{CCT}		400	650	mA


OPTICAL FIBER LINK DISTANCES

Application	Fiber Specification	Distance
Gigabit Ethernet - 1000Base-LX IEEE 802.3:2005	9/125 μ SMF	10.0Km

Dagger Series D38999/19-18 ELIO Dual Port Optical Transceiver,
Single Mode, 1310nm, ARINC 664, 818, 803 & 804 Compliant


OUTLINE DRAWING

Dimensions are shown as: inches [mm]

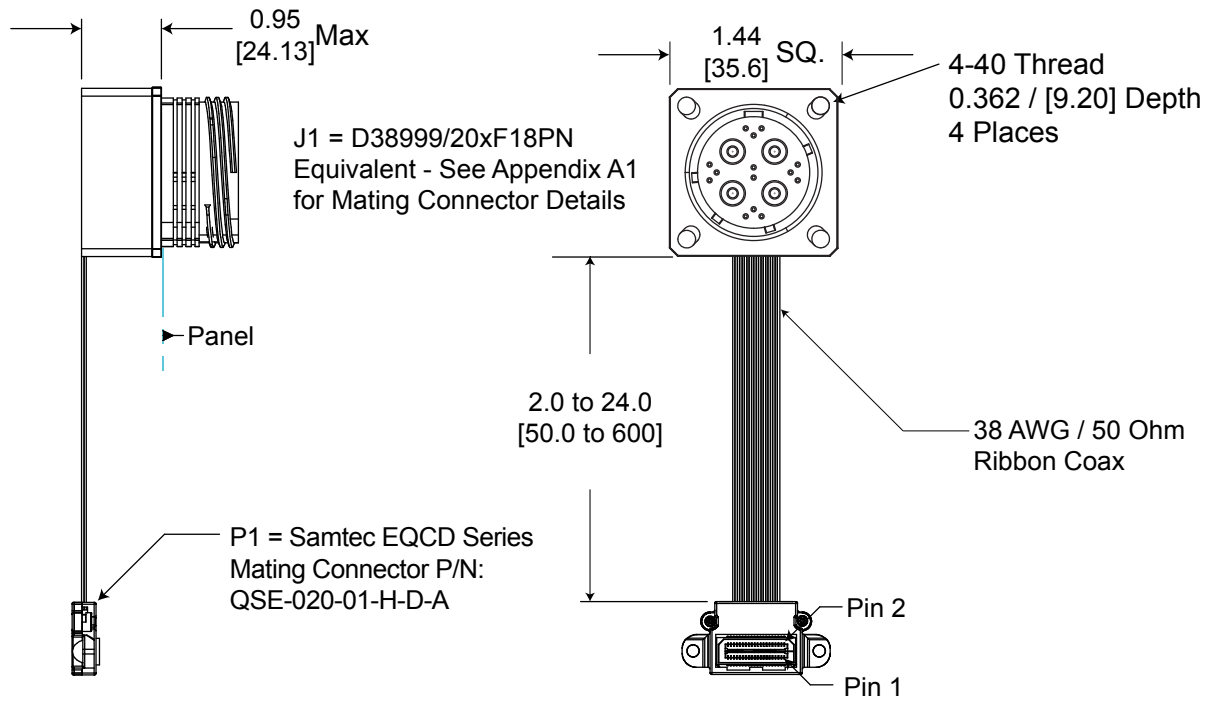

Panel Cutout Dimensions
Rear Panel Mounting Only


Shell Size Code	Shell Size	M Min	P Holes	R BSC
F	19	1.297 (32.94)	0.133 (3.4) 0.123 (3.1)	1.156 (29.4)

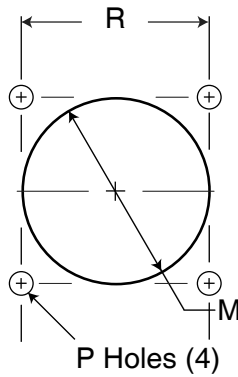

Dagger Series D38999/19-18 ELIO Dual Port Optical Transceiver,
Single Mode, 1310nm, ARINC 664, 818, 803 & 804 Compliant

OUTLINE DRAWING

Cable Length Options

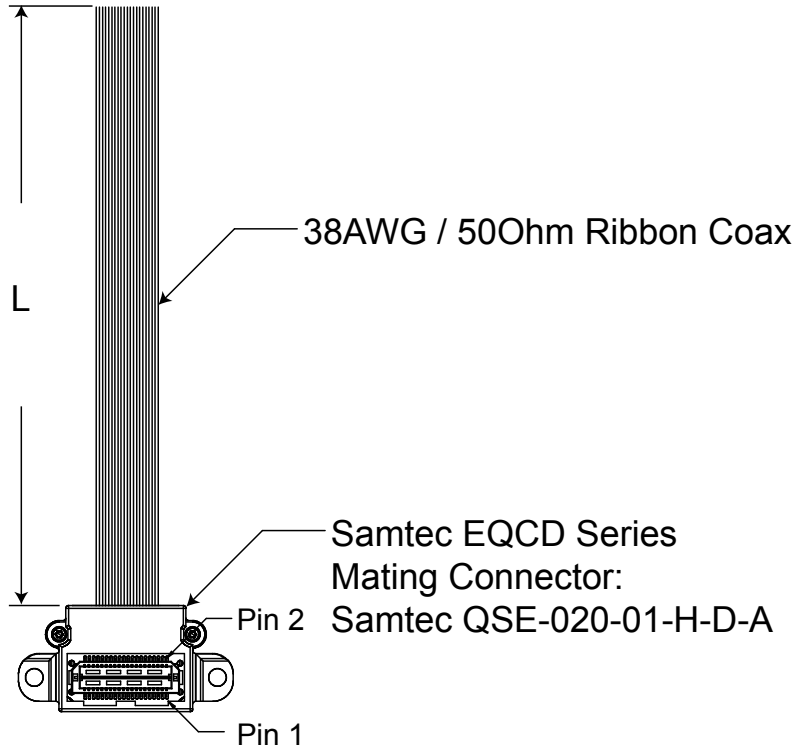

Ribbon Coax Cable Length Options


L (mm) +/- 6.0	ITEM #
----------------	--------

See Appendix A2 on Page 10

Dagger Series D38999/19-18 ELIO Dual Port Optical Transceiver,
 Single Mode, 1310nm, ARINC 664, 818, 803 & 804 Compliant

OPTICAL INSERT ARRANGEMENT

TOP Optical Interface

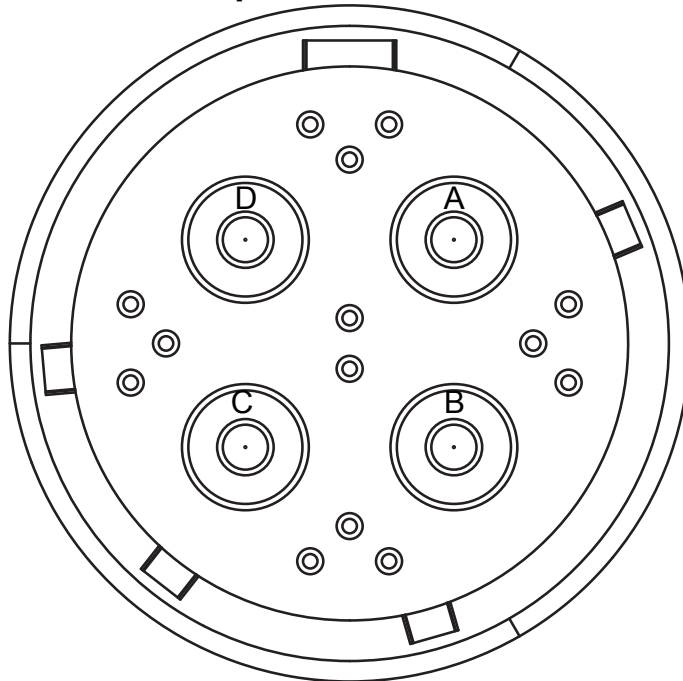

Front face of the optical
 insert shown, fiber optic cable plug
 opposite - see Appendix A2
 for details

OPTICAL PORT ASSIGNMENTS


Dagger Series D38999/19-18 Optical Interface

D38999 CAVITY CODE	LOGICAL PORT NUMBER	PORT FUNCTION
A	0	RX
B	0	TX
C	1	RX
D	1	TX

Dagger Series D38999/19-18 ELIO Dual Port Optical Transceiver,
Single Mode, 1310nm, ARINC 664, 818, 803 & 804 Compliant

PRINTED CIRCUIT BOARD FOOTPRINT

All dimensions shown are for reference only: inches [mm]

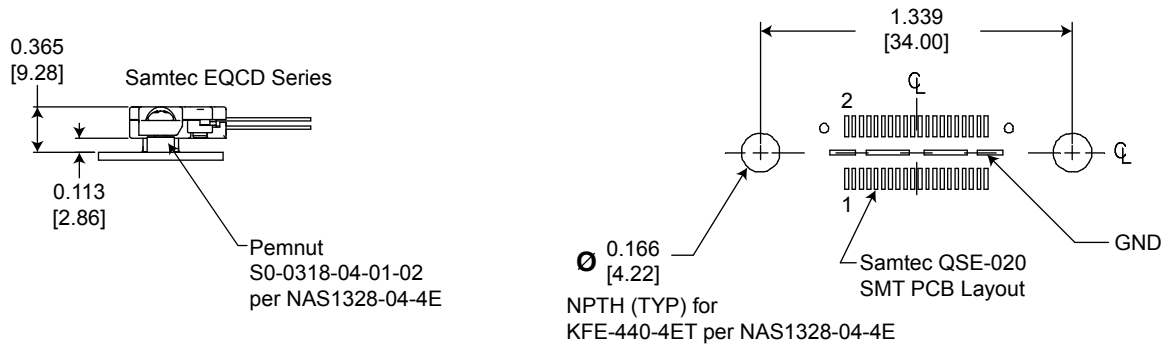

SAMTEC EQCD PIN ASSIGNMENTS

ELECTRICAL			PORT #	OPTICAL PIN #
PIN #	FUNCTION	LOGIC FAMILY		
1	LOS	Open Drain CMOS	0	A
2	GND	N/A	0-1	ALL
3	RX-	CML	0	A
4	NC	N/A	N/A	N/A
5	RX+	CML	0	A
6	TX_DIS	CMOS	0	B
7	TX-	CML	0	B
8	V _{cc}	3.135 to 3.465VDC	0-1	ALL
9	TX+	CML	0	B
10	V _{cc}	3.135 to 3.465VDC	0-1	ALL
11	LOS	Open Drain CMOS	1	C
12	GND	N/A	0-1	ALL
13	RX-	CML	1	C
14	NC	N/A	N/A	N/A
15	RX+	CML	1	C
16	TX_DIS	CMOS	1	D
17	TX-	CML	1	D
18	V _{cc}	3.135 to 3.465VDC	0-1	ALL
19	TX+	CML	1	D
20	V _{cc}	3.135 to 3.465VDC	0-1	ALL

Center slug is Ground.

For the Transmit Disable (TX_DIS) Functions: Logic 1: Disable Optical Output, Logic 0: Enable Optical Output

For the Loss of Signal (LOS) Functions: Satisfactory Optical Input: Logic "0" Output, Unsatisfactory Optical Input: Logic "1" Output

All CML functions are internally AC coupled with 100Ω differential termination.


All other pins are NC.

Dagger Series D38999/19-18 ELIO Dual Port Optical Transceiver,
Single Mode, 1310nm, ARINC 664, 818, 803 & 804 Compliant

APPLICATION SCHEMATIC
For Xilinx Rocket I/O Interfaces

Optical Transceiver

Xilinx Rocket I/O

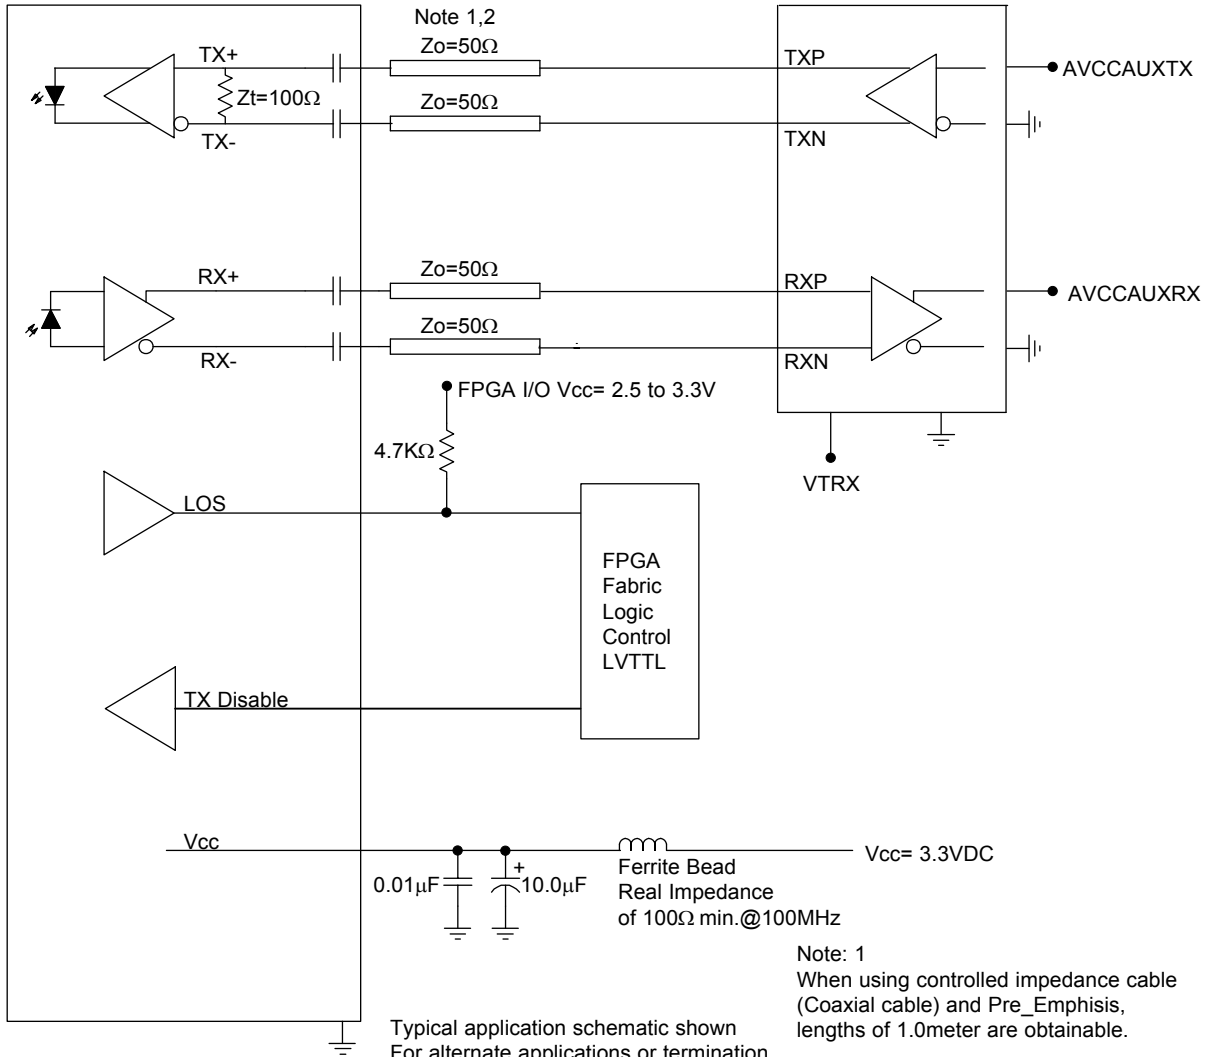

Note: 1
When using controlled impedance cable
(Coaxial cable) and Pre_Emphasis,
lengths of 1.0meter are obtainable.

Note: 2
50 Ohm impedance termination shown.
For alternate impedance requirements,
please consult the Factory.


Dagger Series D38999/19-18 ELIO Dual Port Optical Transceiver,
Single Mode, 1310nm, ARINC 664, 818, 803 & 804 Compliant

APPENDIX A1

Mating Fiber Optic Cable - Plug Configuration

FIBER OPTIC CABLE PLUG - SOCKET INSERT

ESTERLINE SOURIAU PART NUMBER = 8D5E19x84BN x = Finish Code




ESTERLINE SOURIAU ELIO TERMINI PART NUMBER

ELIO® singlemode contact
Ordering information

ELIO	09N	E	L	A
Cable external diameter & Contact sealing:				
09N: 0.9 ^{mm} , Non waterproof				
18N: from 1.5mm to 1.9mm, Non waterproof				
18W: 1.8 ^{mm} , Waterproof				
20N: from 1.7mm to 2.1mm, Non waterproof				
20W: 2.0 ^{mm} , Waterproof				
Fibre type:				
E: ELIO® Singlemode				
Boot type:				
L: Long boot				
S: Short boot				
N: No boot (non waterproof version only)				
Contact version index				



APPENDIX A2
PART NUMBER OPTIONS
Dagger D38999/19-18 Series

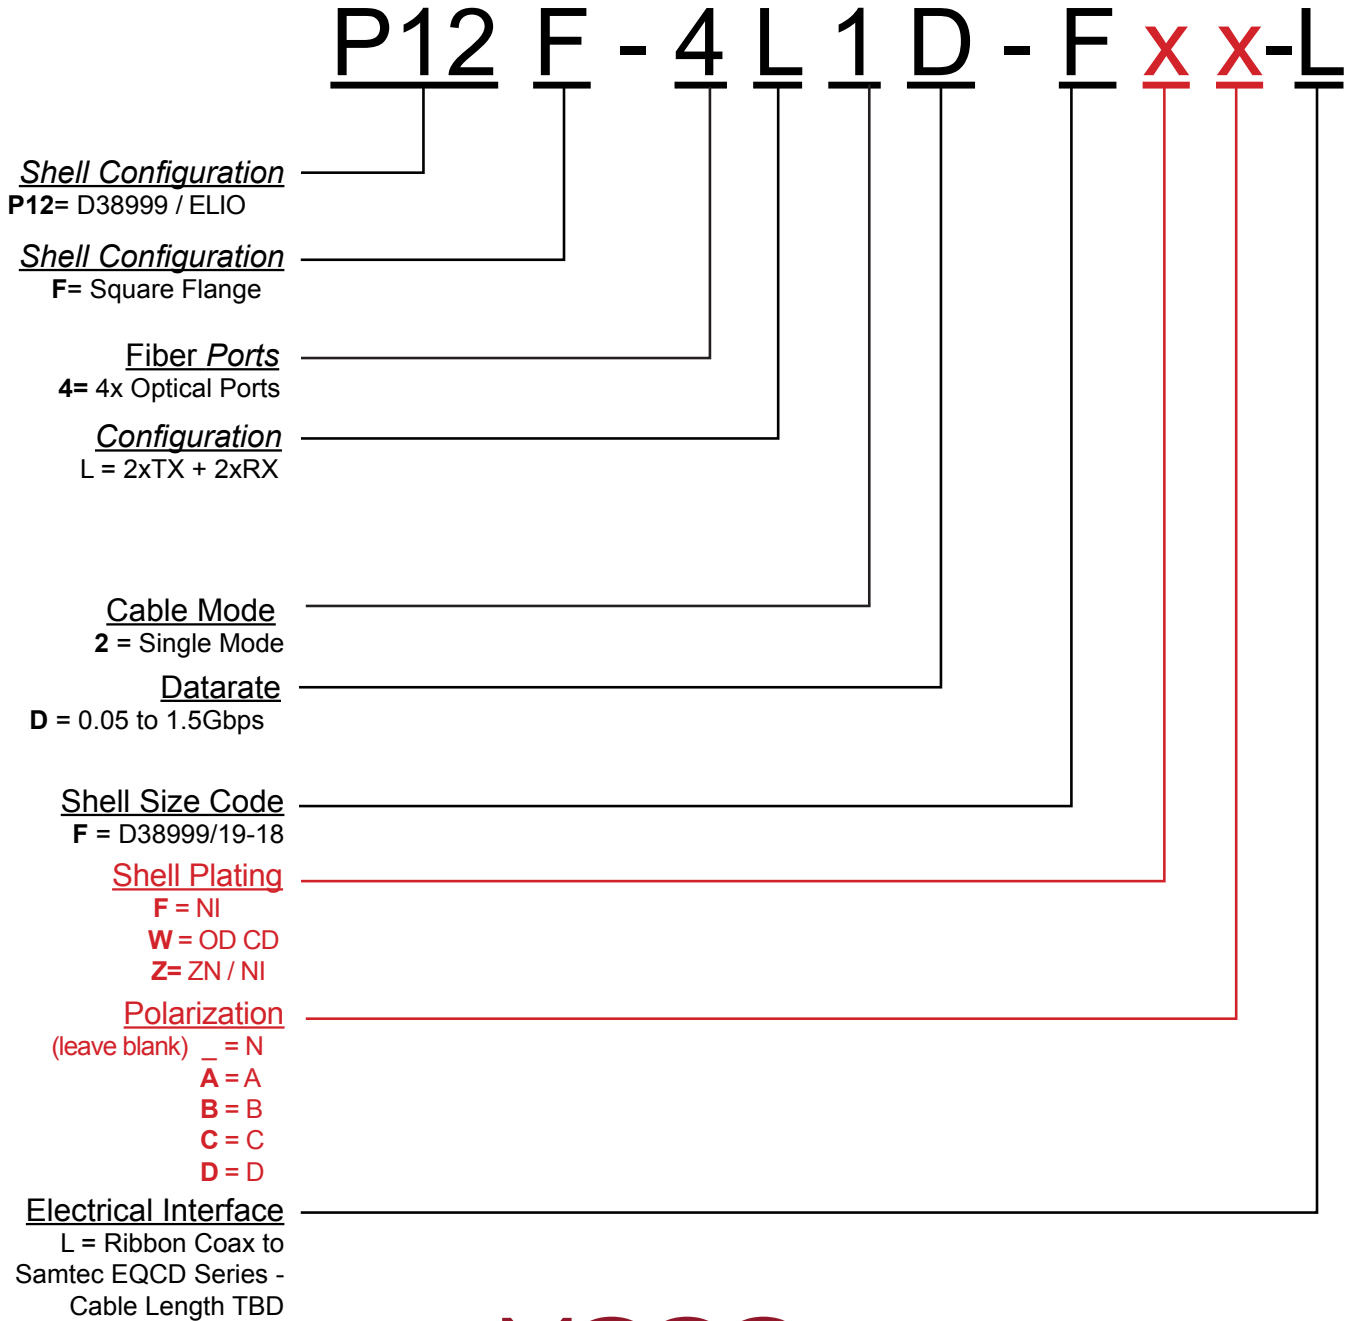

192 Bob Fitz Road, Johnson City, TN 37615
salesmp@moog.com
moogprotokraft.com