

# Lightning Series

## MIL-DTL-38999 Optical Transceiver, FC, Ethernet & sFPDP Applications, Multimode, 850nm VCSELs

### Single Port, Receptacle

#### FEATURES

- Suitable for Gigabit Ethernet, 1x/2xFibre Channel, ARINC 818 and sFPDP applications from 50Mbps to 3.2Gbps
- Optical fiber link distances up to 550 Meters (50/125µ 500MHz\*Km MMF)
- Maximum optical channel bit error rate less than  $1 \times 10^{-12}$
- Operating temperature range from -40°C to +85°C
- Shock, vibration and immersion resistant per MIL-STD-810
- Olive drab cadmium over electroless nickel plating meets stringent corrosion resistance specifications
- Aluminum alloy MIL-DTL-38999 housings are strong, durable, and light weight
- MIL-T-29504 compliant optical fiber connector interface
- Samtec EQCD Series electrical connector for SMT interface


#### APPLICATIONS

Lightning series bulkhead mounted optical transceivers enable high speed network communications over long distances in harsh environments.

- Fast or Gigabit Ethernet switches and peripherals
- Fibre Channel switches and peripherals
- sFPDP data links
- ARINC 818 Video displays and drivers

The MIL-DTL-38999, Series III shell provides a sealed optical interface that is water-tight to MIL-STD-810 / IP67 / NEMA-4x when mated.

The multimode optical fiber interface supports applications where copper cable link distance, bandwidth, weight or bulk make the use of twisted pair, twinax or quadrx copper conductors unacceptable.

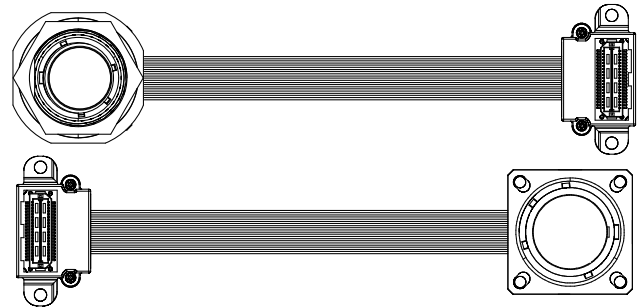

One TX & One RX Channel Operating from 50Mbps to 3.2Gbps

#### DESCRIPTION

Lightning series optical fiber transceivers consist of optoelectronic transmitter and receiver functions integrated into a bulkhead mounted MIL-DTL-38999, Series III receptacle connector. The optical transmitters are 850nm VCSEL lasers. The transmitter input lines are driven with differential CML signals applied to the transmitter (TX+ and TX-) lines. Dual loop, temperature compensated, VCSEL drivers convert the transmitter input signals to suitable VCSEL bias and modulation currents.

The optical receivers consist of PIN and preamplifier assemblies and limiting post-amplifiers. Outputs from the receivers consist of differential CML data signals on the receiver (RX+ and RX-) lines and single ended CMOS indicator functions on the Loss of Signal (LOS) lines. The receiver data lines are squelched upon LOS assertion, preventing errant data generation when an invalid incoming optical signal is presented to the transceiver.

The electrical interface to the Lightning series optical transceivers is a ribbon coax to Samtec EQCD high density cable assembly enabling SMT interconnection to a customer's backplane, motherboard or daughtercard.

Lightning series optical fiber transceivers are vibration isolated, environmentally hardened components designed for use in harsh environment applications.

#### ORDERING INFORMATION

Application	Part Number
GbE, 1x/2xFC, Flange	P38F-2S1D-DW-Lxxx
sFPDP / ARINC 818, Flange	P38F-2S1E-DW-Lxxx
GbE, 1x/2xFC, Jam Nut	P38J-2S1D-DW-Lxxx
sFPDP / ARINC 818, Jam Nut	P38J-2S1E-DW-Lxxx

See page 6 for standard part number / cable length options

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver,  
GbE, 1x/2xFC, ARINC 818 and sFPDP Applications, Multimode, 850nm VCSELS

## ABSOLUTE MAXIMUM RATINGS

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage Temperature	$T_s$	-55		+100	°C
Supply Voltage	$V_{CC}$	-0.5		+4.5	V
TX_DIS Input Voltage	$V_I$	-0.5		$V_{CC} + 0.5$	V
Differential Input Voltage (p-p)	$V_D$			2.2	V
RX Output Current	$I_o$			50	mA

## RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature	$T_A$	-40		+85	°C
Supply Voltage	$V_{CC}$	+3.135		+3.465	V
TX Common Mode Voltage	$V_{CM}$		2.0		V
TX Differential Input Voltage (p-p)	$V_D$	0.25		2.2	V
Power Supply Noise (p-p)	$N_p$			200	mV

## SPECIFICATIONS COMPLIANCE

Requirement	Feature	Condition	Notes
MIL-STD-883	ESD	Class II	2200V
MIL-STD-810	Vibration	3.8g <sup>2</sup> /Hz	43G rms
MIL-STD-810	Shock	40.0g	6-9mS
MIL-STD-810	Immersion	1.0 meter	2 .0Hours
MIL-STD-1344	Flame Resistance	Method 1012	30 Seconds
MIL-STD-1344	Damp Heat	10 Cycles	24 Hours
MIL-STD-38999	Mating Durability	500 Cycles	<0.5dB Change
FDA / CDRH / IEC-825-1	Eye Safety	Class 1	No Safety Interlocks Required

## MATERIALS

Item	Detail	Notes
Shell	Aluminum Alloy	
Shell Plating	Olive Drab Cadmium over Nickel	QQ-P-416, QQ-N-290
Insert	Thermoplastic	
Interfacial Seal	Elastomer	
Alignment Sleeves	Composite Polymer	
Printed Circuits	Polyimide / FR-4	Mil-P-31032 Type 4

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver,  
GbE, 1x/2xFC, ARINC 818 and sFPDP Applications, Multimode, 850nm VCSELs

**OPTICAL TRANSMITTERS**  $T_A$  = Operating Temperature Range,  $V_{CC}$  = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Output Power (BER<10 <sup>-12</sup> )	$P_o$	-9.5		-4.0	dBm
Optical Output Wavelength	$\lambda_{OUT}$	830	850	860	nM
Spectral Width	$\Delta\lambda_{RMS}$			0.85	nM
Extinction Ratio	ER	9.0			dB
Optical Rise, Fall Time (20% to 80%)	$t_{R,F}$			150	pS

**OPTICAL RECEIVERS**  $T_A$  = Operating Temperature Range,  $V_{CC}$  = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Sensitivity (BER<10 <sup>-12</sup> , ER=9.0) P38x-xxxD-xx @ 125Mbps to 1.25Gbps P38x-xxxD-xx @ 2.125Gbps P38x-xxxE-xx @ 2.5Gbps to 3.2Gbps	$P_I$	-17.0 -15.0 -14.0		0.0	dBm
Optical Wavelength	$\lambda_{IN}$	830		860	nM
RX Data Output - Low	$V_{OL} - V_{CC}$	-1.810		-1.475	V
RX Data Output - High	$V_{OH} - V_{CC}$	-1.165		-0.880	V

**POWER SUPPLY CURRENT**  $T_A$  = Operating Temperature Range,  $V_{CC}$  = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Supply Current per Port	$I_{CCT}$		100	140	mA


**OPTICAL LINK DISTANCES**

Protocol	62.5/125 $\mu$ 200MHz*Km	50/125 $\mu$ 500MHz*Km
2xFibre Channel - ANSI X3.297 FC-PI	150M	300M
Gigabit Ethernet - IEEE-802.3:2005	275M	550M
1xFibre Channel - ANSI X3.297 FC-PH-2	300M	500M

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver,  
GbE, 1x/2xFC, ARINC 818 and sFPDP Applications, Multimode, 850nm VCSELs

### OUTLINE DRAWING - Flange Option


Dimensions are shown as: inches (mm)

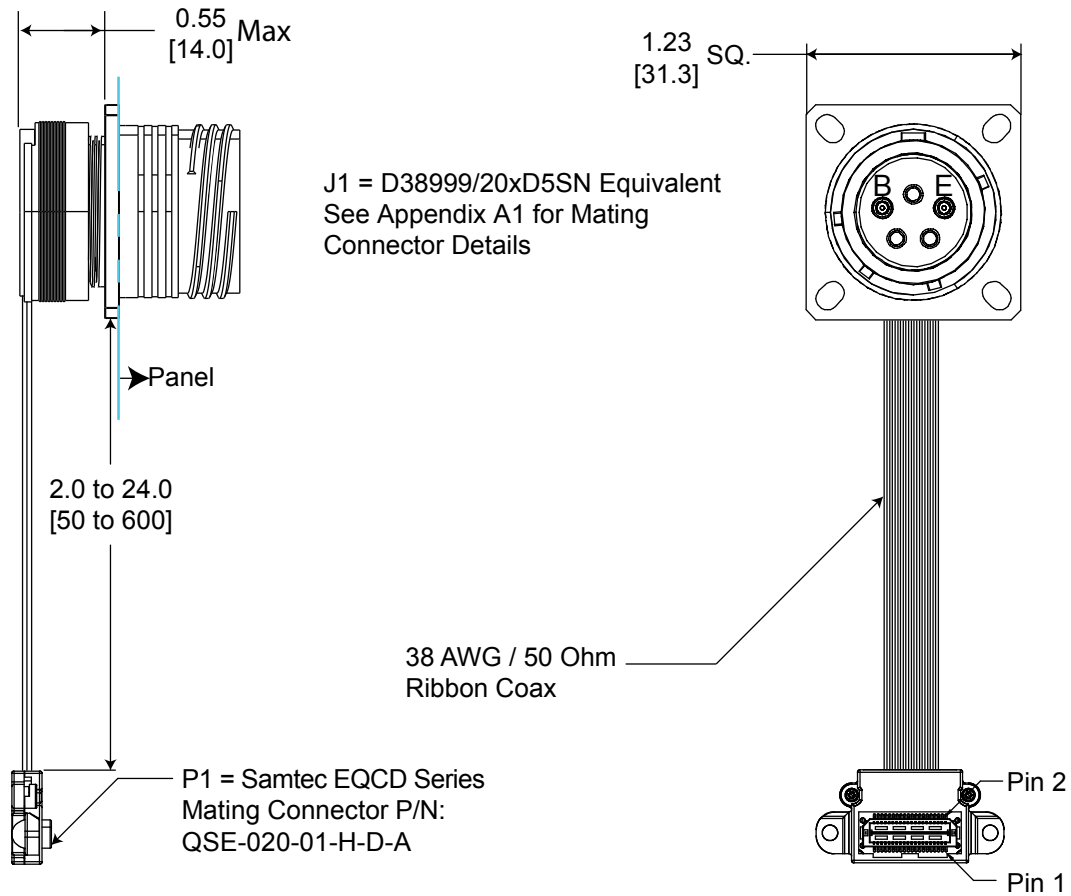

### Panel Cutout Dimensions

Rear Panel Mounting Only

Shell Size Code	Shell Size	M Min	P Holes	R Bsc
D	15	1.047 (26.59)	0.133 (3.4) 0.123 (3.1)	0.969 (24.6)

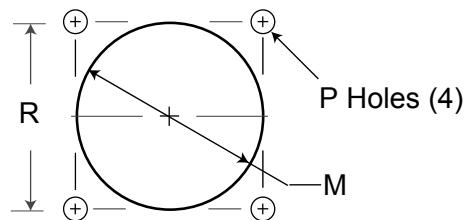


Part Number = \*P38F-2xxx-Dx-Lxxx

\*see page 6 for part number / cable length options and page 11 for complete ordering options

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver,  
GbE, 1x/2xFC, ARINC 818 and sFPDP Applications, Multimode, 850nM VCSELs


### OUTLINE DRAWING - Jam Nut Option

Dimensions are shown as: inches [mm]

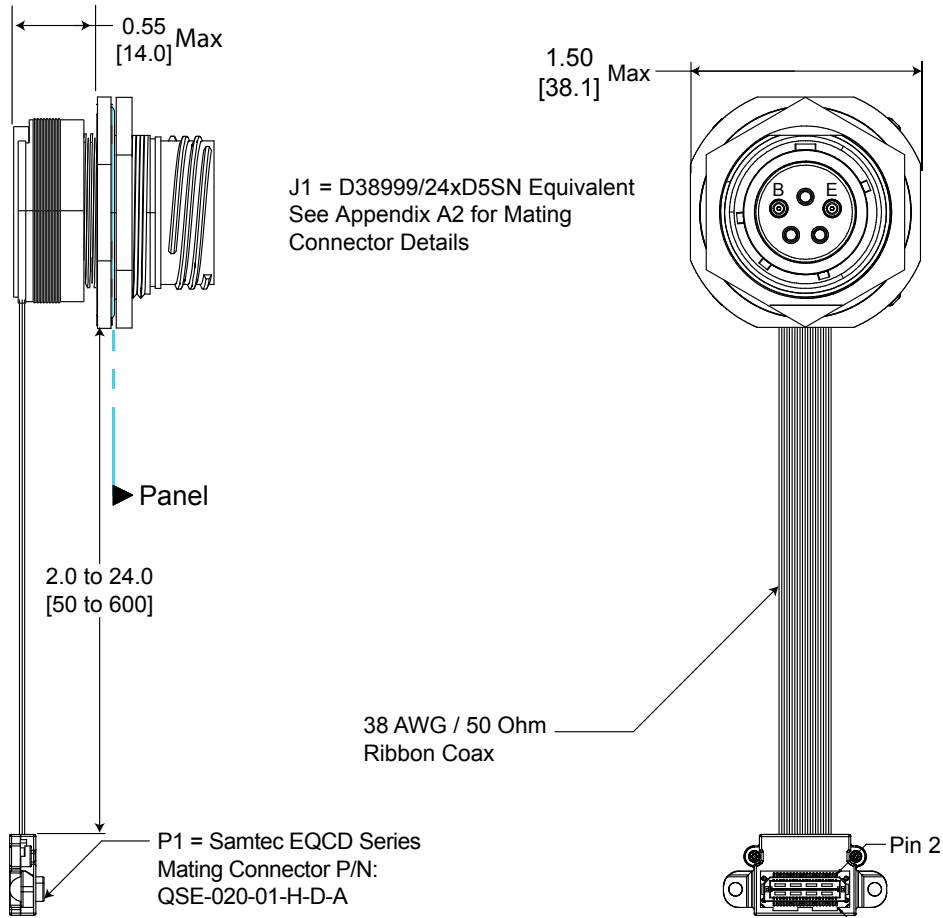

#### Panel Cutout Dimensions

Shell Size Code	Shell Size	D1 Min	D2 Min
D	15	1.135 [28.83]	1.085 [27.56]

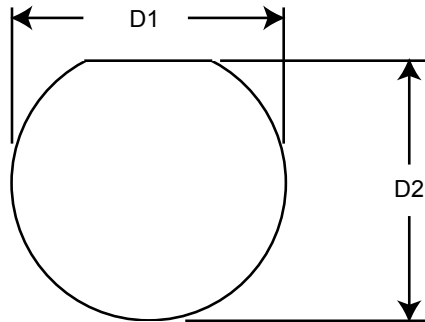


Part Number = \*P38J-2xxx-Dx-Lxxx

\*see page number 6 for part number / cable length options and page 11 for complete ordering options

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver,  
GbE, 1x/2xFC, ARINC 818 and sFPDP Applications, Multimode, 850nm VCSELs

## OUTLINE DRAWING

Cable Length Options

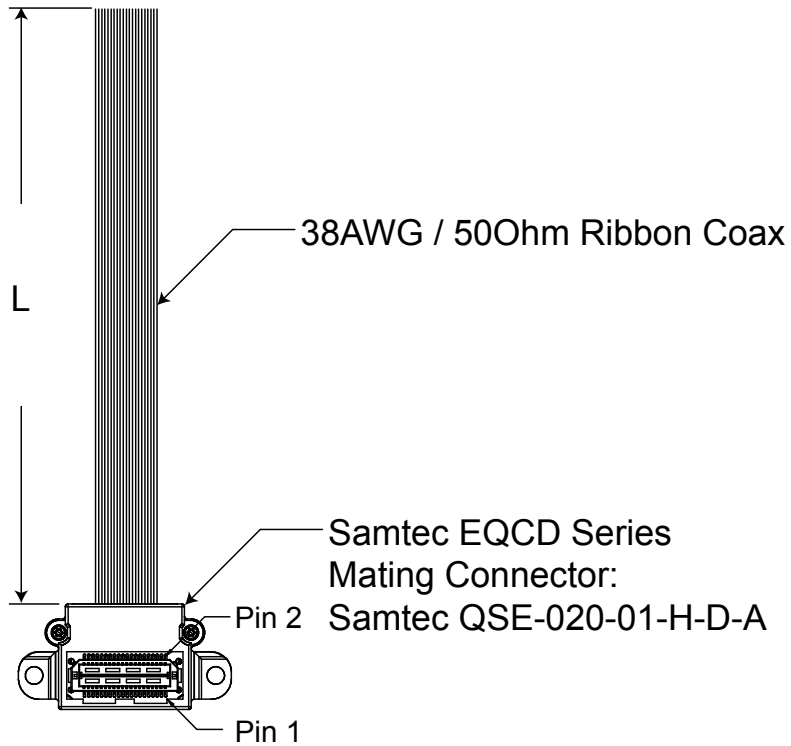


### Ribbon Coax Cable Length Options

L (mm) +/- 6.0	ITEM #
50	xxxx-xxxx-xx-L050
100	xxxx-xxxx-xx-L100
150	xxxx-xxxx-xx-L150
200	xxxx-xxxx-xx-L200
250	xxxx-xxxx-xx-L250

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver,  
GbE, 1x/2xFC, ARINC 818 and sFPDP Applications, Multimode, 850nm VCSELs

## OPTICAL INSERT ARRANGEMENT

TOP

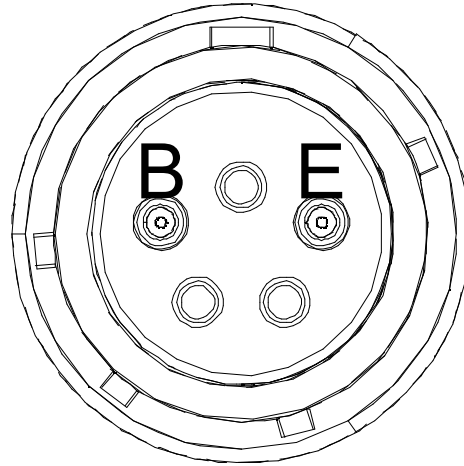

Front view of the MIL-DTL-38999 optical  
insert shown, fiber optic cable plug  
opposite - see Appendix A1  
for mating connector details

## OPTICAL PORT ASSIGNMENTS


### MIL-DTL-38999 OPTICAL INTERFACE

PORT NUMBER	TX	RX
0	B	E

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver,  
GbE, 1x/2xFC, ARINC 818 and sFPDP Applications, Multimode, 850nm VCSELs

**PRINTED CIRCUIT BOARD FOOTPRINT**

All dimensions shown are for reference only: inches [mm]

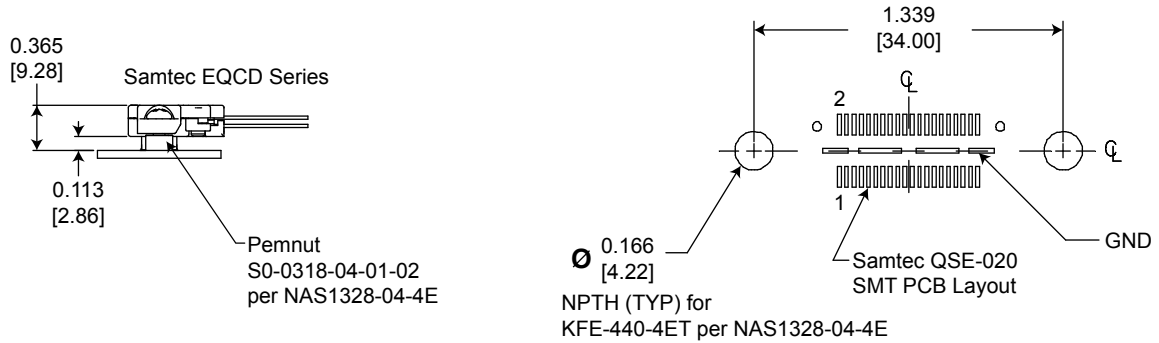

**Samtec EQCD PIN ASSIGNMENTS**

PIN #	FUNCTION	Input / Output	Logic Family
1	LOS	Output	Open Drain CMOS Satisfactory Optical Input: Logic "0" Output Unsatisfactory Optical Input: Logic "1" Output
2	Signal Ground	NA	NA
3	RX-	Output	CML (Internally AC coupled)
4	NC	NA	NA
5	RX+	Output	CML (Internally AC coupled)
6	TX_Dis	Input	CMOS Internal 4.7KΩ to 10.0KΩ pullup
7	TX-	Input	CML (Internally AC coupled) Internal 100Ω differential termination
8	V <sub>CC</sub>	Input	3.135 to 3.465VDC
9	TX+	Input	CML (Internally AC coupled) Internal 100Ω differential termination
10	V <sub>CC</sub>	Input	3.135 to 3.465VDC
18	V <sub>CC</sub>	Input	3.135 to 3.465VDC
20	V <sub>CC</sub>	Input	3.135 to 3.465VDC

Center slug is Ground, all other pins are NC

TX\_Dis functions:

Logic 1: Disable Optical Output

Logic 0: Enable Optical Output




## APPLICATION SCHEMATIC

For Xilinx Rocket I/O Interfaces

### Bulkhead Transceiver

### Xilinx Rocket I/O

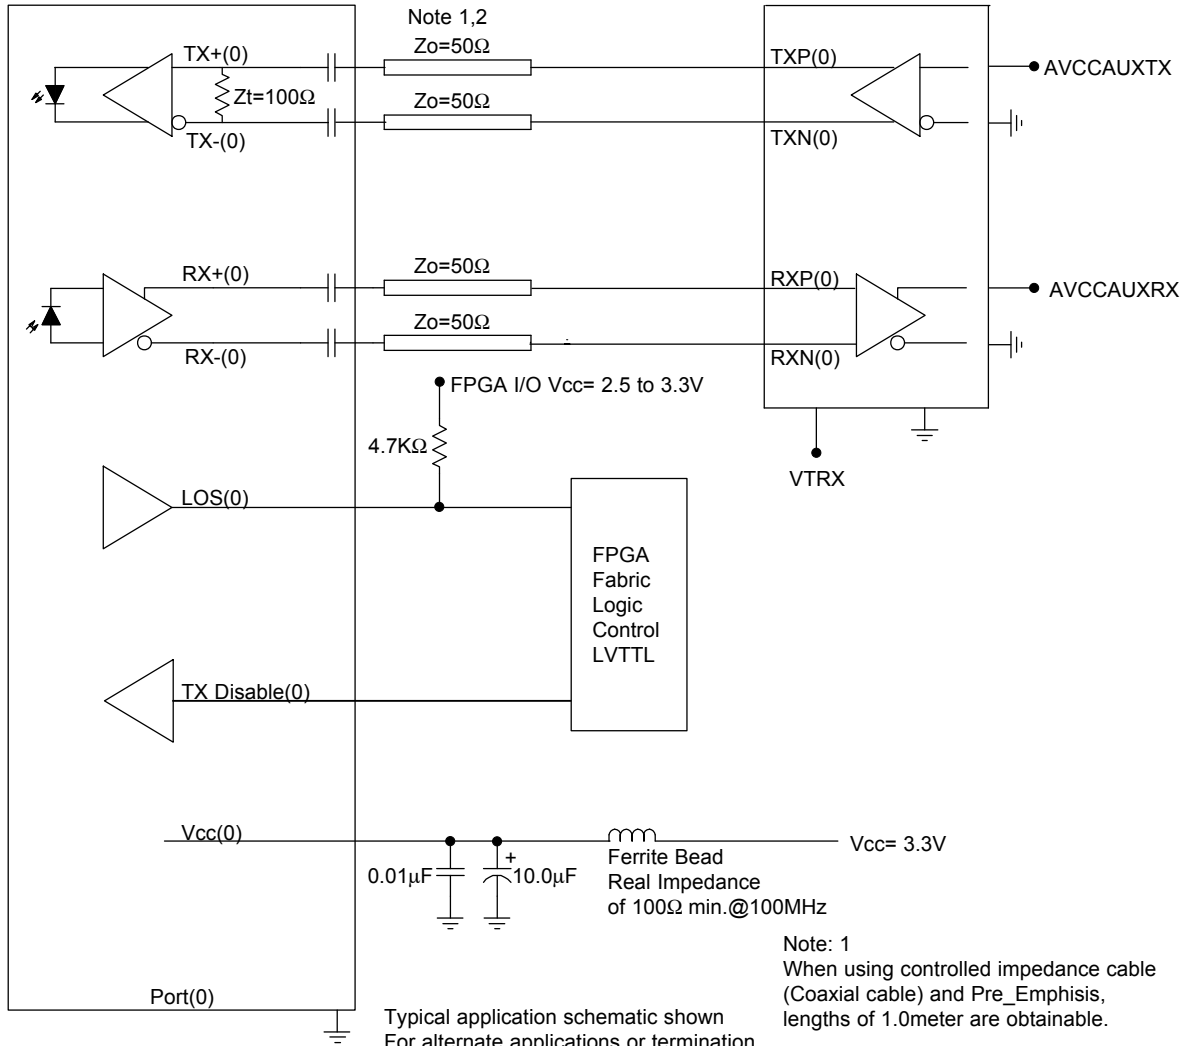

Typical application schematic shown  
For alternate applications or termination  
techniques, please consult the Factory

Note: 1  
When using controlled impedance cable  
(Coaxial cable) and Pre\_Emphasis,  
lengths of 1.0meter are obtainable.

Note: 2  
50 Ohm impedance termination shown.  
For alternate impedance requirements,  
please consult the Factory.

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver,  
GbE, 1x/2xFC, ARINC 818 and sFPDP Applications, Multimode, 850nm VCSELs

## APPENDIX A1

### MIL-DTL-38999 FIBER OPTIC CABLE PLUG / MIL-T-29504 PIN TERMINI

\*See DSCC or SAE QPL for Approved Suppliers


<http://www.dsccl.dla.mil/programs/qmlqpl/QPLdetail.asp?QPL=38999>

#### \*D38999 PLUG - PIN INSERT

##### MIL-DTL-38999 CABLE PLUG

MS PLUG P/N

\*D38999/26WD5PN

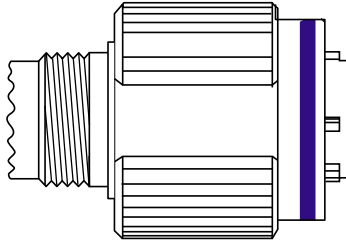

#### \*FIBER OPTIC PIN TERMINUS

##### MIL-T-29504 PIN TERMINUS

MS PIN TERMINUS P/N

\*M29504/04-xxxx\*\*



\*\*defined by fiber optic cable configuration

#### D38999 PLUG PORT FUNCTIONS



PORT NUMBER	TX	RX
0	B	E

#### \*CABLE PROTECTION CAP

##### D38999/32 PLUG PROTECTION CAP

MS PLUG CAP P/N

\*D38999/32W15N

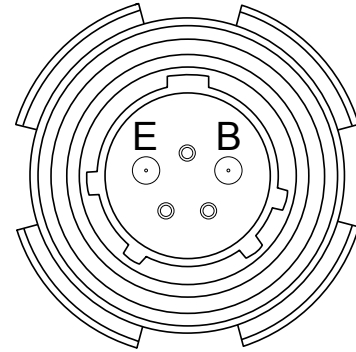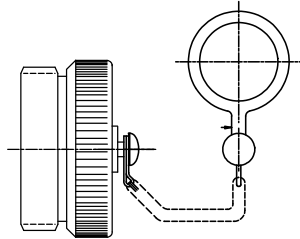



Front face of the optical cable plug pin insert shown. Transceiver insert opposite.

#### \*CABLE BACKSHELL

##### MIL-C-85049 CABLE BACKSHELL


MS BACKSHELL P/N

\*MS85049/xxxxxx\*\*

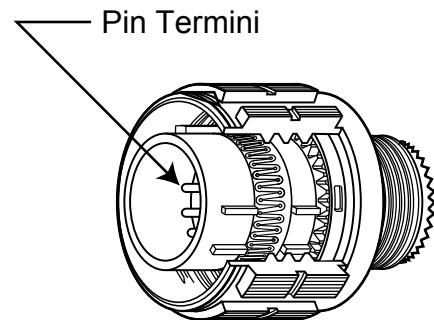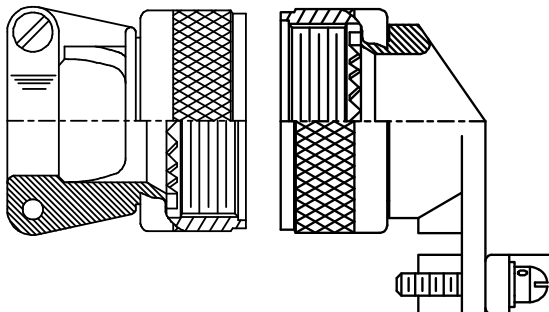

\*\*Straight or angled backshell - defined by application / mounting configuration

**APPENDIX A2**  
**PART NUMBER OPTIONS**  
Single Port, Square Flange, VCSEL

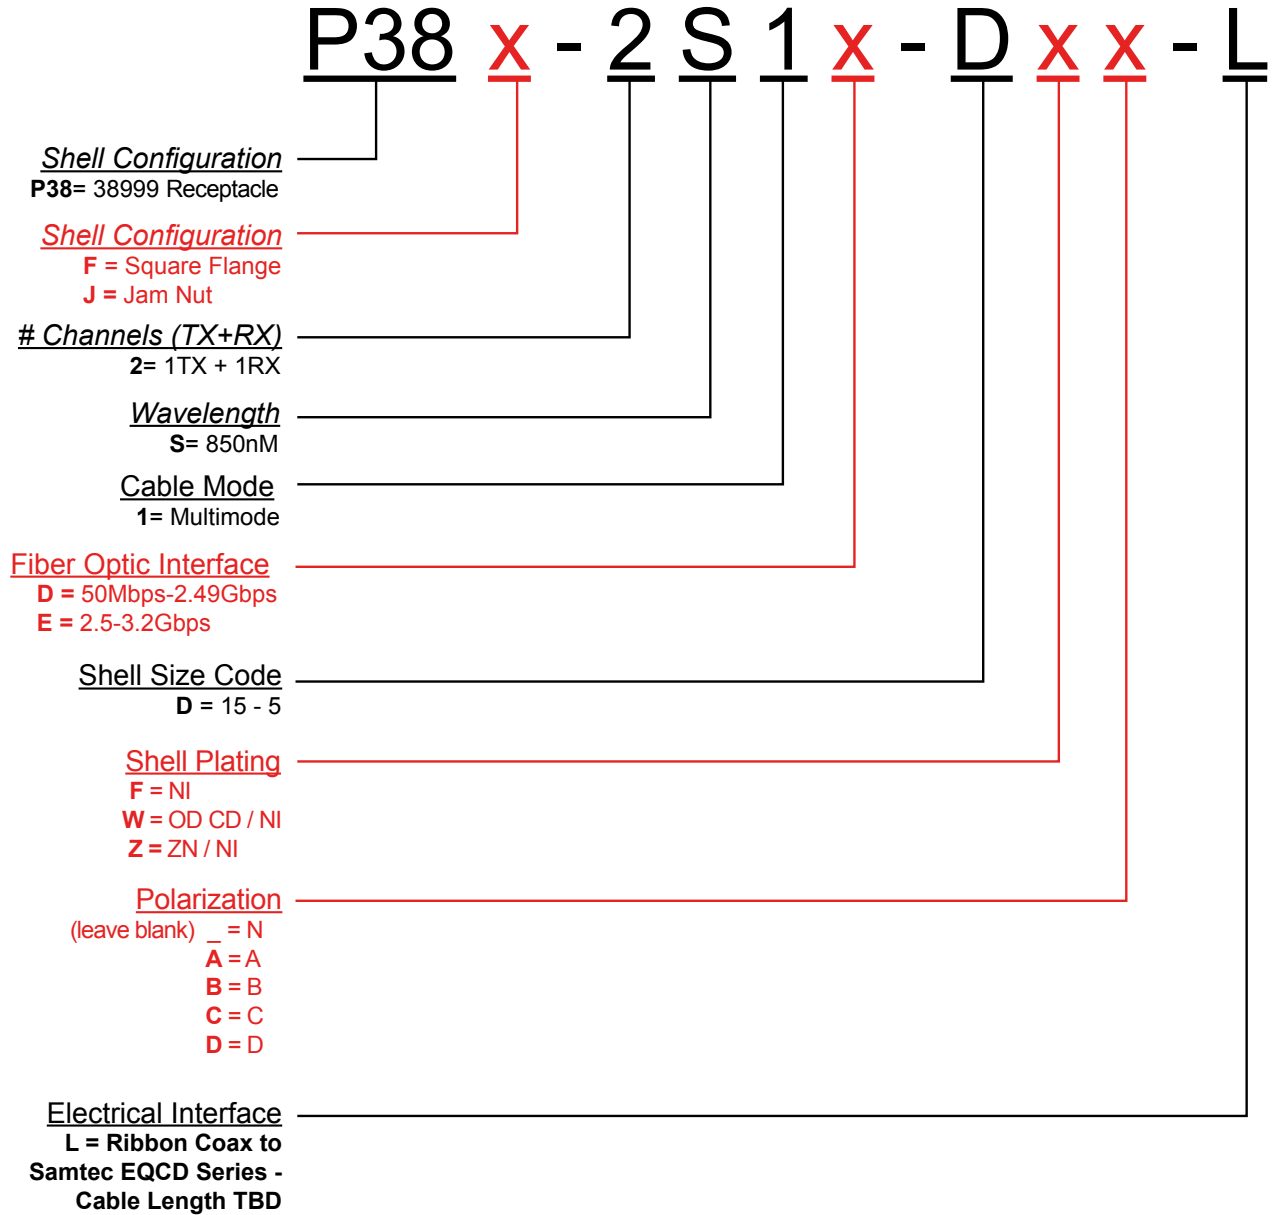

Other wavelength, mounting and port count options are available.  
Please consult the Protokraft website for alternate configurations.



192 Bob Fitz Road, Johnson City, TN 37615  
salesmp@moog.com  
moogprotokraft.com