

Lightning Series

MIL-DTL-38999 Optical

Transceiver, 100Mbps to 3.2Gbps

Applications, Multimode, 850nm

Single Port Transceiver Receptacle

FEATURES

- Suitable for ARINC 818, sFPDP and other applications from 100Mbps to 3.2Gbps
- Optical fiber link distances up to 550 Meters (50/125µ 500MHz*Km MMF)
- Maximum optical channel bit error rate less than 1×10^{-12}
- Operating temperature range from -40°C to +85°C
- Shock, vibration and immersion resistant per MIL-STD-810
- Olive drab cadmium over electroless nickel plating meets stringent corrosion resistance requirements
- Aluminum alloy MIL-DTL-38999 housings are strong, durable, and light weight
- MIL-T-29504 compliant optical fiber connector interface
- MIL-DTL-32139 Compliant

APPLICATIONS

Lightning series bulkhead mounted optical transceivers enable high speed network communications over long distances in harsh environments.

- sFPDP data links
- ARINC 818 Video displays and drivers

The MIL-DIL-38999, Series III shell provides a sealed optical interface that is water-tight to MIL-STD-810 / IP67 / NEMA-4x when mated.

The multimode optical fiber interface supports applications where copper cable link distance, bandwidth, weight or bulk make the use of twisted pair, twinax or quadax copper conductors unacceptable.

One TX and One RX Channel Operating from 100Mbps to 3.2Gbps

DESCRIPTION

Lightning series optical fiber transmitters consist of optoelectronic transmitter functions integrated into a bulkhead mounted MIL-DTL-38999, Series III receptacle connector. The optical transmitters are 850nm VCSEL lasers. The transmitter input lines are driven with differential CML signals applied to the transmitter (TX+ and TX-) lines. Dual loop, temperature compensated, VCSEL drivers convert the transmitter input signals to suitable VCSEL bias and modulation currents.

The optical receivers consist of PIN and preamplifier assemblies and limiting post-amplifiers. Outputs from the receivers consist of differential CML data signals on the receiver (RX+ and RX-) lines and single ended CMOS indicator functions on the Loss of Signal (LOS) lines. The receiver data lines are squelched upon LOS assertion, preventing errant data generation when an invalid incoming optical signal is presented to the transceiver.

The electrical interface to the Lightning series optical transmitters is a MIL-DTL-32139 compliant Nano-D connector.

Lightning series optical fiber transceiver are vibration isolated, environmentally hardened components designed for use in harsh environment applications.

ORDERING INFORMATION

Application	Part Number
100Mbps to 2.49Gbps	P38x-2S1D-Dx-ND
2.5Gbps to 3.2Gbps	P38x-2S1E-Dx-ND

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver, ARINC 818 and sFPDP Applications, Multimode

ABSOLUTE MAXIMUM RATINGS

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage Temperature	T_S	-55		+100	°C
Supply Voltage	V_{CC}	-0.5		+4.5	V
Differential Input Voltage (p-p)	V_D			2.0	V
					V

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature	T_A	-40		+85	°C
Supply Voltage	V_{CC}	+3.135		+3.465	V
TX Differential Input Voltage (p-p)	V_D	0.25		2.0	V
Power Supply Noise (p-p)	N_P			200	mV

CONNECTOR INTERFACE SPECIFICATIONS COMPLIANCE

Requirement	Feature	Condition	Notes
MIL-STD-883	ESD	Class II	2200V
MIL-STD-810	Vibration	3.8g ² /Hz	43G rms
MIL-STD-810	Shock	40.0g	6-9mS
MIL-STD-810	Immersion	1.0 meter	2 .0Hours
MIL-STD-1344	Flame Resistance	Method 1012	30 Seconds
MIL-STD-1344	Damp Heat	10 Cycles	24 Hours
MIL-STD-38999	Mating Durability	500 Cycles	<0.5dB Change
FDA / CDRH / IEC-825-1	Eye Safety	Class 1	No Safety Interlocks Required

MATERIALS

Item	Detail	Notes
Shell	Aluminum Alloy	
Shell Plating	Olive Drab Cadmium over Nickel	QQ-P-416, QQ-N-290
Insert	Thermoplastic	
Interfacial Seal	Elastomer	
Alignment Sleeves	Composite Polymer	
Printed Circuits	Polyimide / FR-4	Mil-P-31032 Type 4

Single Port Lightning Series MIL-DTL-38999 Optical
Transceiver, ARINC 818 and sFPDP Applications, Multimode

OPTICAL TRANSMITTERS T_A = Operating Temperature Range, V_{CC} = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Output Power (BER<10 ⁻¹²)	P_o	-9.5		-4.0	dBm
Optical Output Wavelength	λ_{OUT}	830	850	860	nM
Spectral Width	$\Delta\lambda_{RMS}$			0.85	nM
Extinction Ratio	ER	6.0	9.0		dB
Optical Rise, Fall Time (20% to 80%)	$t_{R,F}$			150	pS

POWER SUPPLY CURRENT T_A = Operating Temperature Range, V_{CC} = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Supply Current per TX	I_{CCT}		90	120	mA

OPTICAL RECEIVERS T_A = Operating Temperature Range, V_{CC} = 3.135V to 3.465V

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Sensitivity (BER<10 ⁻¹² , ER=9.0) P38x-xxxD-xx @ 125Mbps to 1.25Gbps P38x-xxxD-xx @ 2.125Gbps P38x-xxxE-xx @ 2.5Gbps to 3.2Gbps	P_i	-17.0 -15.0 -14.0		0.0	dBm
Optical Wavelength	λ_{IN}	830		860	nM
RX Data Output - Low	$V_{OL} - V_{CC}$	-1.810		-1.475	V
RX Data Output - High	$V_{OH} - V_{CC}$	-1.165		-0.880	V


OPTICAL LINK DISTANCES

Protocol	62.5/125 μ 200MHz*Km	50/125 μ 500MHz*Km
2xFibre Channel - ANSI X3.297 FC-PI	150M	300M
Gigabit Ethernet - IEEE-802.3:2005	275M	550M
1xFibre Channel - ANSI X3.297 FC-PH-2	300M	500M

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver, ARINC 818 and sFPDP Applications, Multimode

OUTLINE DRAWING - Flange Option


Dimensions are shown as: inches (mm)

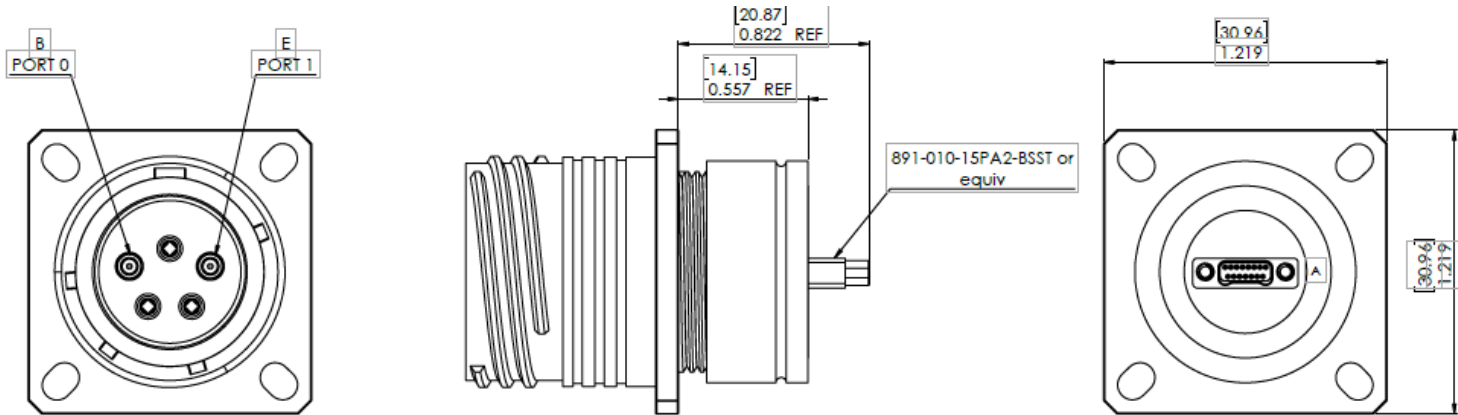

Panel Cutout Dimensions

Rear Panel Mounting Only

Shell Size Code	Shell Size	M Min	P Holes	R Bsc
D	15	1.047 (26.59)	0.133 (3.4) 0.123 (3.1)	0.969 (24.6)

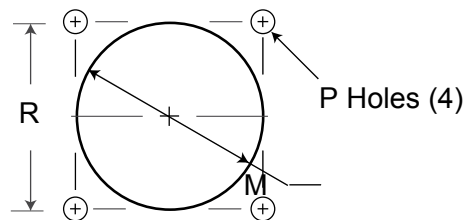


Part Number = *P38F-2xxx-Dx-ND

*see page 11 for complete ordering options

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver, ARINC 818 and sFPDP Applications, Multimode


OUTLINE DRAWING - Jam Nut Option

Dimensions are shown as: inches [mm]

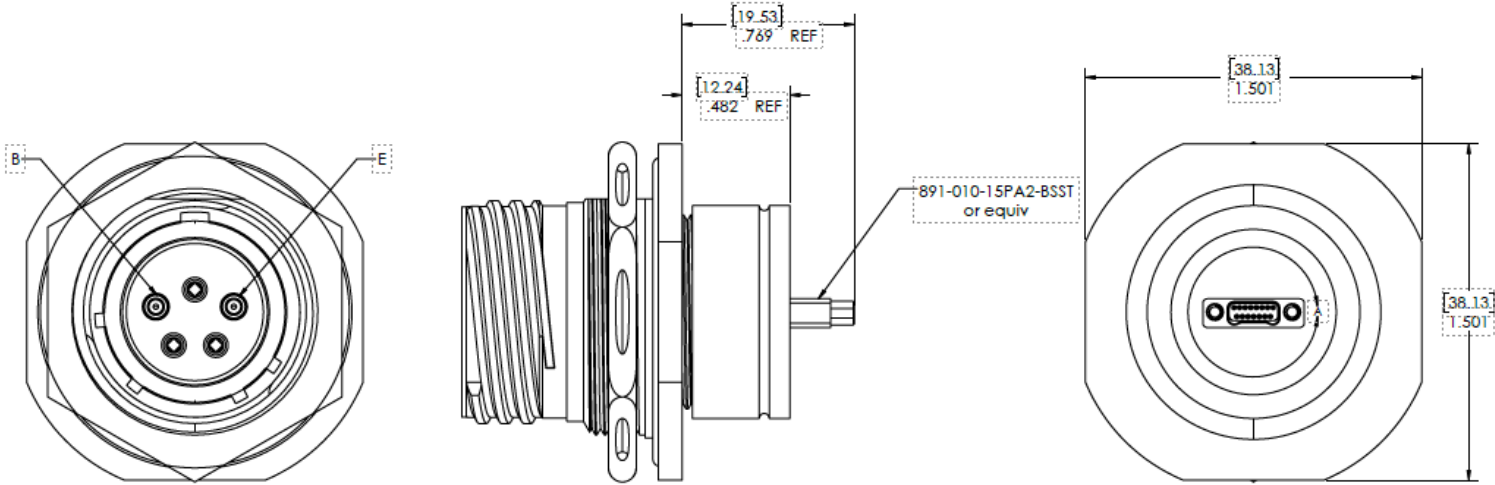

Panel Cutout Dimensions

Shell Size Code	Shell Size	D1 Min	D2 Min
D	15	1.135 [28.83]	1.085 [27.56]

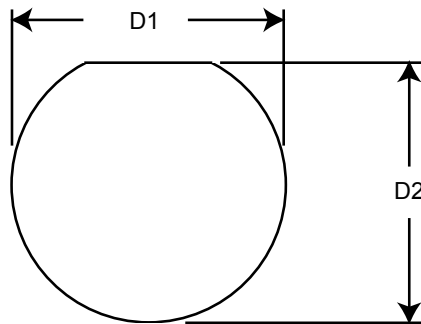


Part Number = *P38J-2xxx-Dx-ND
 *see page 11 for complete ordering options

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver, ARINC 818 and sFPDP Applications, Multimode

OPTICAL INSERT ARRANGEMENT

TOP

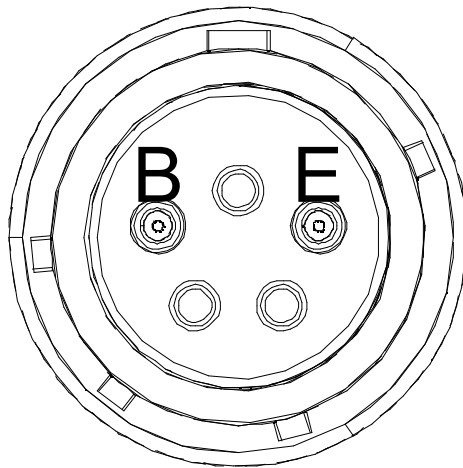

Front view of the MIL-DTL-38999 optical insert shown, fiber optic cable plug opposite - see Appendix A1 for mating connector details


OPTICAL PORT ASSIGNMENTS

MIL-DTL-38999 OPTICAL INTERFACE

FUNCTION	PIN #
TX	B
RX	E

Single Port Lightning Series MIL-DTL-38999 Optical
Transceiver, ARINC 818 and sFPDP Applications, Multimode
NANO-D ELECTRICAL PIN ASSIGNMENTS

All dimensions shown are for reference only: inches [mm]

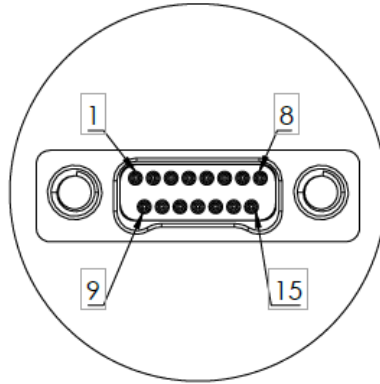


PIN NUMBER	SYMBOL	DESCRIPTION	LOGIC FAMILY
1	RX_VCC	POWER SUPPLY	N/A
2	GND	GROUND	N/A
3	LOS	LOSS OF SIGNAL - OUTPUT Logic 1: UNSATISFACTORY OPTICAL INPUT Logic 0: SATISFACTORY OPTICAL INPUT	OPEN DRAIN CMOS
4	NC	FACTORY CONNECT ONLY	N/A
5	TX_DIS	Transmit Disable - Input Logic 1: Disable Optical Output Logic 0: Enable Optical Output	CMOS Internal 4.7K Ω to 10.0K Ω pullup
6	TX_FAULT	INTERNAL TX FAULT INDICATOR - OUTPUT Logic 1: INTERNAL FAULT Logic 0: SATISFACTORY OPERATION	OPEN DRAIN CMOS
7	GND	GROUND	N/A
8	TX_VCC	POWER SUPPLY	N/A
9	GND	GROUND	N/A
10	RX-	RECEIVER DATA OUTPUT	CML (INTERNALLY AC COUPLED) Internal 100 Ω differential termination
11	RX+	RECEIVER DATA OUTPUT	CML (INTERNALLY AC COUPLED) Internal 100 Ω differential termination
12	GND	GROUND	N/A
13	TX+	TRANSMITTER DATA INPUT	CML (INTERNALLY AC COUPLED) Internal 100 Ω differential termination
14	TX-	TRANSMITTER DATA INPUT	CML (INTERNALLY AC COUPLED) Internal 100 Ω differential termination
15	GND	GROUND	N/A

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver, ARINC 818 and sFPDP Applications, Multimode

APPLICATION SCHEMATIC
For Xilinx Rocket I/O Interfaces

Bulkhead Transceiver

Xilinx Rocket I/O

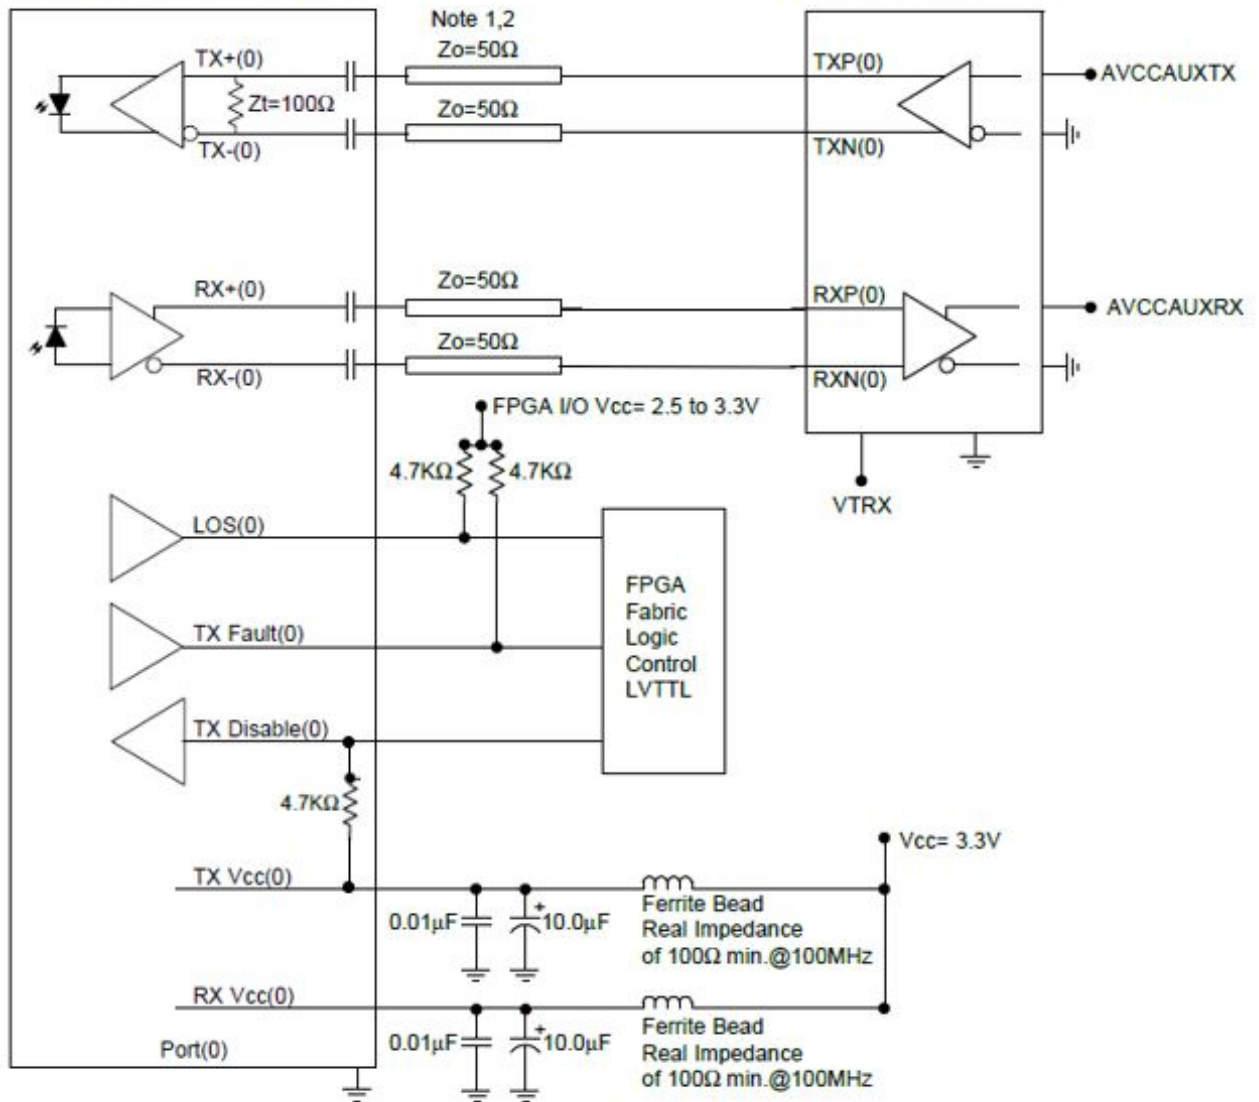

Typical application schematic shown
For alternate applications or termination
techniques, please consult the Factory

Note: 1
When using controlled impedance cable
(Coaxial cable) and Pre_Emphasis,
lengths of 1.0meter are obtainable.

Note: 2
50 Ohm impedance termination shown.
For alternate impedance requirements,
please consult the Factory.

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver, ARINC 818 and sFPDP Applications, Multimode

APPENDIX A1

MIL-DTL-38999 FIBER OPTIC CABLE PLUG / MIL-T-29504 PIN TERMINI

*See DSCC or SAE QPL for Approved Suppliers


<http://www.dsccl.dla.mil/programs/qmlqpl/QPLdetail.asp?QPL=38999>

*D38999 PLUG - PIN INSERT

MIL-DTL-38999 CABLE PLUG

MS PLUG P/N

*D38999/26WD5PN




*FIBER OPTIC PIN TERMINUS

MIL-T-29504 PIN TERMINUS

MS PIN TERMINUS P/N

*M29504/04-xxxx**




**defined by fiber optic cable configuration

*CABLE PROTECTION CAP

D38999/32 PLUG PROTECTION CAP


MS PLUG CAP P/N

*D38999/32W15N



D38999 PLUG PORT FUNCTIONS

FUNCTION	PIN
TX	B
RX	E

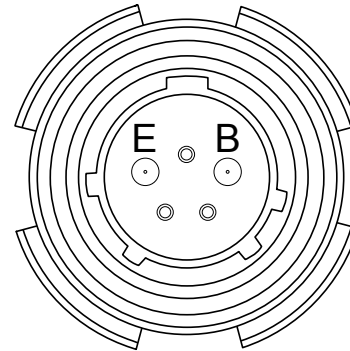


Front face of the optical cable plug pin insert shown. Transceiver insert opposite.

*CABLE BACKSHELL


MIL-C-85049 CABLE BACKSHELL

MS BACKSHELL P/N

*MS85049/xxxxxx**

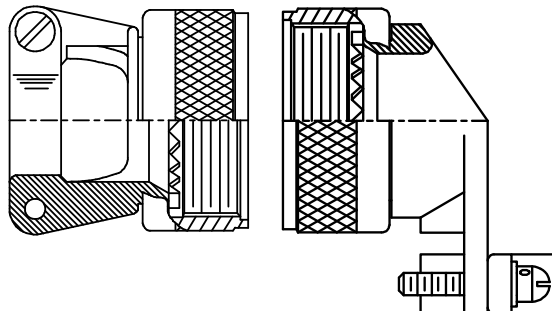

Pin Termini

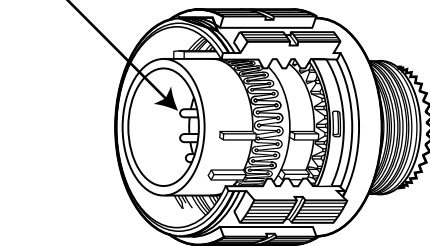


**Straight or angled backshell - defined by application / mounting configuration

Single Port Lightning Series MIL-DTL-38999 Optical Transceiver, ARINC 818 and sFPDP Applications, Multimode

APPENDIX A2
PART NUMBER OPTIONS
 Dual Port Transmitters

P38 X - 2 S 1 X - D X X - ND

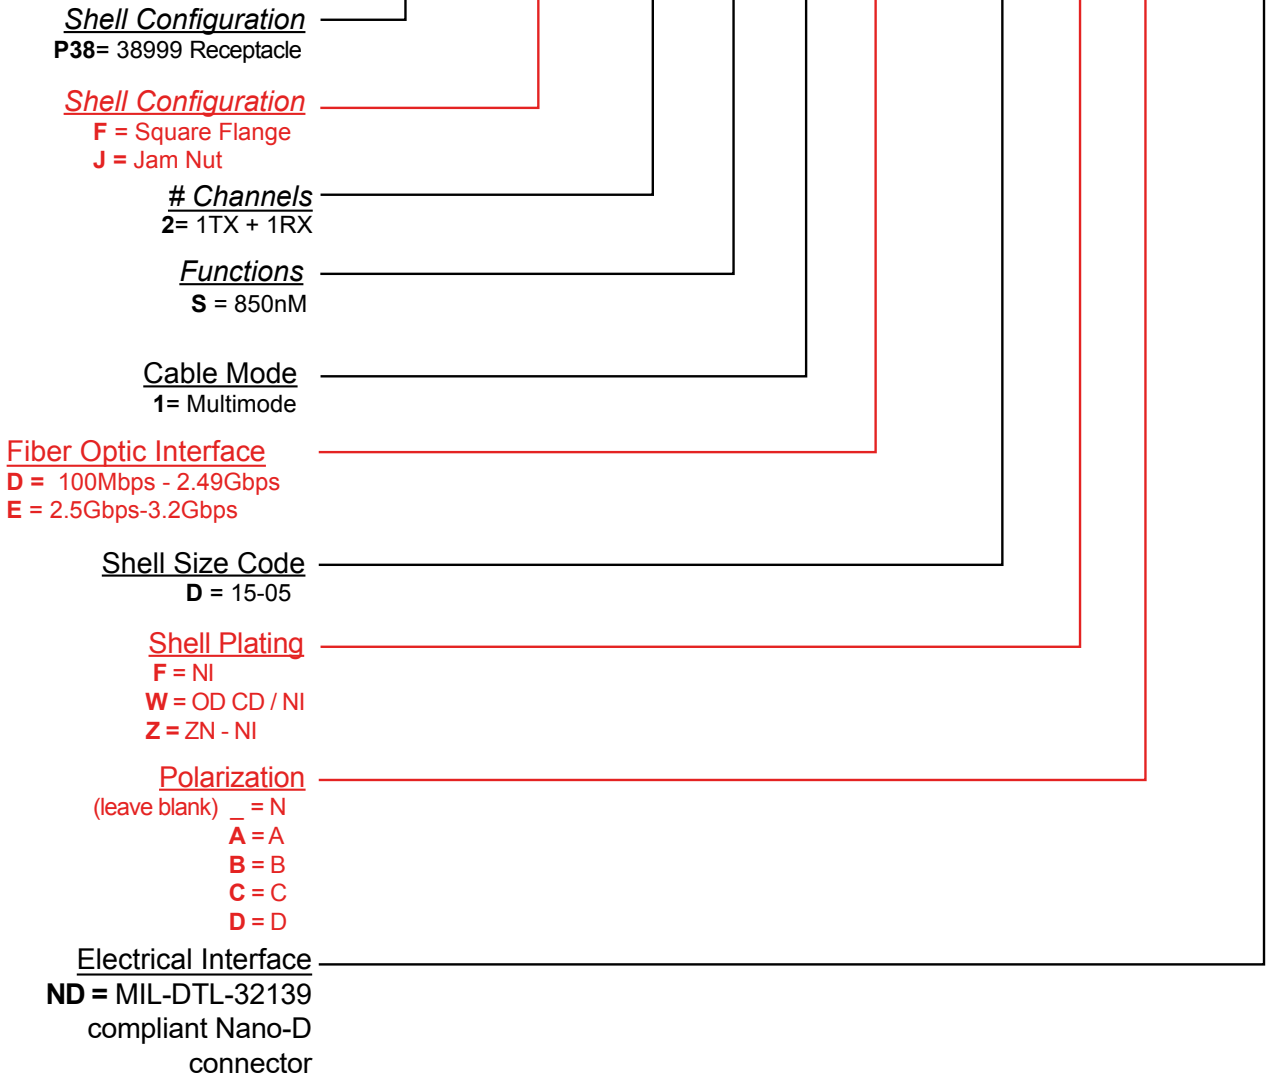

Other wavelength, mounting and port count options are available. Please consult the Protokraft website for alternate configurations.



192 Bob Fitz Road, Johnson City, TN 37615
 salesmp@moog.com
 moogprotokraft.com