

MUSTANG SERIES

FAST ETHERNET, TFOCA II®, 100BASE-TX / FX MEDIA CONVERTER,
MULTIMODE, 1310 nM, USB POWERED - 5.0 VDC



Mustang series Fast Ethernet media converters consist of optoelectronic transmitter and receiver functions integrated along with the 100Base-TX electrical to 100Base-FX optical media conversion circuitry into a jam-nut TFOCA II® style fiber optic connector assembly.

The optical transmitters are high output 1310 nM devices. The optical receivers consist of InGaAs PIN and preamplifier assemblies and limiting post-amplifiers.

The electrical interface to the Mustang series optical media converters is a MIL-DTL-38999 cylindrical connector enabling interconnection to a cable assembly for USB power and Ethernet signal sources.

Mustang series Fast Ethernet media converters are vibration isolated, environmentally hardened components designed for use in harsh environment applications.

- Sealed against liquid and solid contaminants
- Shock and vibration resistant

SINGLE PORT MUSTANG SERIES *TFOCA II® CONNECTOR, 100BASE-TX TO 100BASE-FX MEDIA CONVERTER, MULTIMODE, 1310 NM, USB POWERED (5.0 VDC)

Single Port, Jam Nut, USB Powered
TFOCA II to D38999 / Optical to Electrical Media Converter

FEATURES

- Compliant with IEEE-802.3:2005 Fast Ethernet 100Base-TX and 100Base-FX
- Optical fiber link distances up to 2.0 kilometers
- Copper Ethernet link distances up to 100 meters (EIA / TIA Cat-5E)
- Operating temperature range from -40° to +85° C
- Shock, vibration and immersion resistant per MIL-STD-810
- Zinc nickel plating meets stringent corrosion resistance requirements
- Aluminum housings are strong, durable and light weight
- TFOCA II® compliant optical fiber connector interface
- MIL-DTL-38999 electrical interface for power and signals

APPLICATIONS

Mustang series bulkhead mounted Fast Ethernet media converters enable high speed network communications over long distances in harsh environments.

- Fast Ethernet switches and peripherals
- Telecom and datacom switch / router rack-to-rack links
- Storage or computation clusters

The TFOCA II® and D38999 shells provide sealed interfaces that are water-tight to MIL-STD-810 when mated.

The multimode optical fiber interface supports applications where copper cable link distance, bandwidth, weight or bulk make the use of twisted pair, twinax or quadrax copper conductors unacceptable.

**TFOCA-II® is a registered trademark of Amphenol Fiber Systems International*

ORDERING INFORMATION

Application	Part Number
Single Port 100Base-TX / FX - USB	P51J-2LCU-Fx-V-S2

SINGLE PORT MUSTANG SERIES *TFOCA II® CONNECTOR, 100BASE-TX TO 100BASE-FX MEDIA CONVERTER, MULTIMODE, 1310 NM, USB POWERED (5.0 VDC)

ABSOLUTE MAXIMUM RATINGS

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Storage Temperature	T_s	-55		+100	°C
Supply Voltage	V_{cc}	-0.5		8.0	V
Data Input Voltage	V_i	-0.5		V_{cc}	V

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Operating Temperature	T_A	-40		+85	°C
Supply Voltage	V_{cc}	+4.5	+5.0	+5.5	VDC
Power Supply Noise (p-p)	N_p			200	mV

INTERFACE SPECIFICATIONS COMPLIANCE (DESIGNED IAW)

Requirement	Feature	Condition	Notes
MIL-STD-883	ESD	Class II	2200 V
MIL-STD-810	Vibration	30 grms	
MIL-STD-810	Shock	40.0 g	6-9 mS
MIL-STD-1344	Flame Resistance	Method 1012	30 Seconds
MIL-STD-1344	Damp Heat	10 Cycles	24 Hours
TFOCA II	Mating Durability	2000 Cycles	EIA / TIA-455-21
FDA / CDRH / IEC-825-1	Eye Safety	Class 1	No Safety Interlocks Required

MATERIALS

Item	Detail	Notes
D38999 and TFOCA II Cylindrical Shells	Aluminum	
D38999 and TFOCA II Finish	ZN-NI, OD-CD or NI	
D38999 Inserts	Thermoplastic	
Interfacial Seals	Elastomer	
Optical Ferrules	Zirconia	
Printed Circuits	FR-4	Urethane Conformal Coating
Housing	Aluminum	

SINGLE PORT MUSTANG SERIES *TFOCA II® CONNECTOR, 100BASE-TX TO 100BASE-FX MEDIA CONVERTER, MULTIMODE, 1310 NM, USB POWERED (5.0 VDC)

TRANSMITTERS T_A = OPERATING TEMPERATURE RANGE

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Output Power	P_o	-15.0		-8.0	dBm
Optical Output Wavelength	λ_{OUT}	1260	1310	1360	nM

RECEIVERS T_A = OPERATING TEMPERATURE RANGE

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Optical Sensitivity	P_i	-31.5		-1.0	dBm
Optical Wavelength	λ_{IN}	1100		1590	nM

SUPPLY CURRENT T_A = OPERATING TEMPERATURE RANGE

Parameter	Symbol	Minimum	Typical	Maximum	Unit
Supply Current per Port	I_{CCT}		615	875	mA

OPTICAL FIBER LINK DISTANCES

Application	Fiber Specification	Distance
Fast Ethernet - IEEE 802.3u FDDI PMD ISO / IEC 9314-3	62.5 / 125 μ - 500 MHz*Km	2.0 Km
	50 / 125 μ - 500 MHz*Km	2.0 Km


ETHERNET COPPER CABLE LINK DISTANCES

Application	Cable Specification	Distance
Fast Ethernet - IEEE 802.3u	TIA / EIA-568-B Cat 5*	100 M

*For other transmission media, please consult the factory.

SINGLE PORT MUSTANG SERIES *TFOCA II® CONNECTOR, 100BASE-TX TO 100BASE-FX MEDIA CONVERTER, MULTIMODE, 1310 NM, USB POWERED (5.0 VDC)


OUTLINE DRAWING

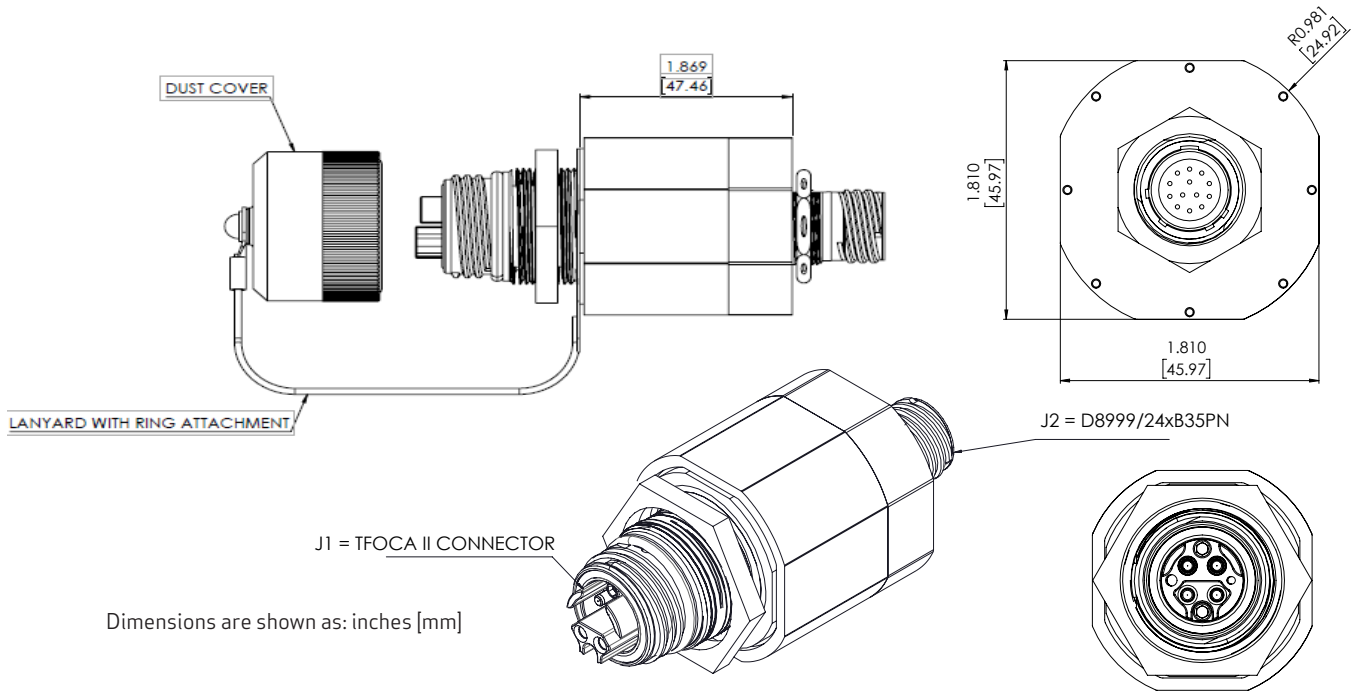

PORT / FUNCTION ASSIGNMENTS

Port Number	Function
J1	1 x 100Base-FX
J2	1 x 100Base-TX + 5.0 VDC


PANEL CUTOUT DIMENSIONS

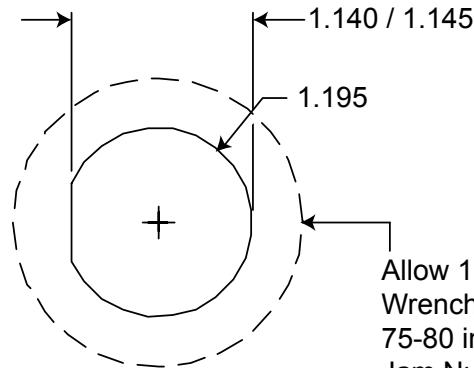

Dimensions are shown as: inches
Panel Thickness: 0.12 to 0.26

SINGLE PORT MUSTANG SERIES *TFOCA II® CONNECTOR, 100BASE-TX TO 100BASE-FX MEDIA CONVERTER, MULTIMODE, 1310 NM, USB POWERED (5.0 VDC)

J1 OPTICAL INSERT PIN FUNCTIONS - ETHERNET PORT AND PIN ASSIGNMENTS

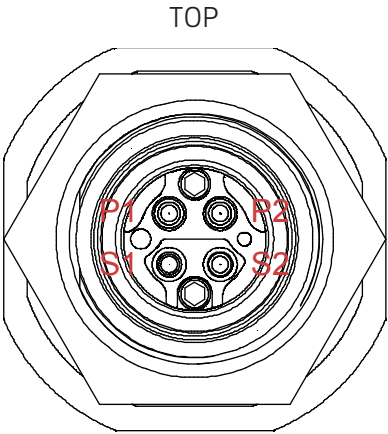


Front view of the TFOCA II media converter optical insert shown - fiber optic cable plug opposite.

**OPTICAL PORT ASSIGNMENTS
TFOCA II OPTICAL INTERFACE**

Port Number	RX	TX
0	P1	S1

SINGLE PORT MUSTANG SERIES *TFOCA II® CONNECTOR, 100BASE-TX TO 100BASE-FX MEDIA CONVERTER, MULTIMODE, 1310 NM, USB POWERED (5.0 VDC)

TOP VIEW

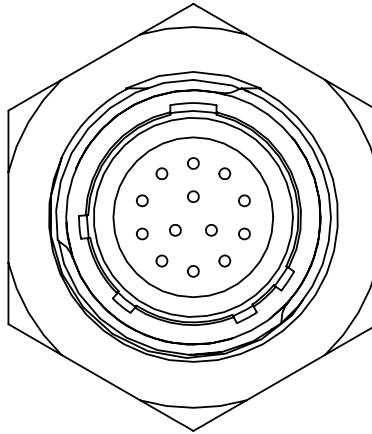

Front view of the J2 connector shown - mating cable plug opposite.

J2 / D38999 / 24WD35PN ELECTRICAL PIN FUNCTIONS

Pin Number	Port	Function	RJ-45 Eq. Pin Number	Logic Family
1	N/A	NC	N/A	N/A
2	0	TX+	1	IEEE-802.3:2005 1000Base-T
3	0	TX-	2	IEEE-802.3:2005 1000Base-T
4	0	RX+	3	IEEE-802.3:2005 1000Base-T
5	0	RX-	6	IEEE-802.3:2005 1000Base-T
6	N/A	NC	N/A	N/A
7	N/A	NC	N/A	N/A
8	N/A	NC	N/A	N/A
9	N/A	NC	N/A	N/A
10	N/A	NC	N/A	N/A
11	N/A	NC	N/A	N/A
12	0	5 VDC Rtn	N/A	N/A
13	0	5 VDC	N/A	N/A

TX functions are outputs, RX functions are inputs.

SINGLE PORT MUSTANG SERIES *TFOCA II® CONNECTOR, 100BASE-TX TO 100BASE-FX MEDIA CONVERTER, MULTIMODE, 1310 NM, USB POWERED (5.0 VDC)

APPENDIX A1 PART NUMBER OPTIONS

P51 J - 2 L C U - F x x - V - S2

SHELL CONFIGURATION
P51 = TFOCA II Receptacle

SHELL CONFIGURATION
J = Jam Nut

CHANNELS (TX+RX)
2 = 1 TX + 1 RX

WAVELENGTH
L = 1310nm

POWER SUPPLY
C = 5 VDC

FIBER OPTIC INTERFACE
U = 100 Mbps

SHELL SIZE CODE
F = TFOCA II

SHELL PLATING
F = NI
W = OD CD / NI
Z = ZN / NI

A = D38999 / Enclosure - CAD
 TFOCA II - Ni-PTFE

SHELL POLARIZATION
 (Leave blank) = N

A = A
B = B
C = C
D = D

Other wavelength, mounting and port count options are available.
 Please consult the Protokraft website for alternate configurations.

ELECTRICAL INTERFACE
V = MIL-DTL-38999

S2 = REVERSED PIN OUT
URETHANE CONFORMAL COATED



192 Bob Fitz Road, Johnson City, TN 37615
 salesmp@moog.com
 moogprotokraft.com