

MC300D-HV DIGITAL 2-AXIS 600VDC BRUSHLESS MOTOR CONTROLLER




This series of digital militarized high voltage controllers is designed to provide torque, velocity, and position loop closure. The controller accepts command signals from any fire control system (FCS), in either digital or analog format, and interfaces with a control handle. The advanced space vector algorithms provide optimum performance for new or existing motors to provide superior power densities. There is a soft start circuit utilized to control inrush current upon application of high voltage power. There is also an Insulated-Gate Bipolar Transistor (IGBT) shunt regulator that can be routed to an external

resistor to control regen energy if required. Additionally, there are a wide range of end user programmable software features, as listed below.

PROGRAMMABLE SOFTWARE FEATURES

- Extensive built in test
- No-fire zones
- Obstacle avoidance zones
- End-damping limits
- Health Usage Monitoring System (HUMS)
- Acceleration limits
- Comprehensive loop tuning
- Tracking/stabilization modes
- Field weakening
- Joystick shaping function
- Analog and digital I/O
- Status and fault history
- Data logging

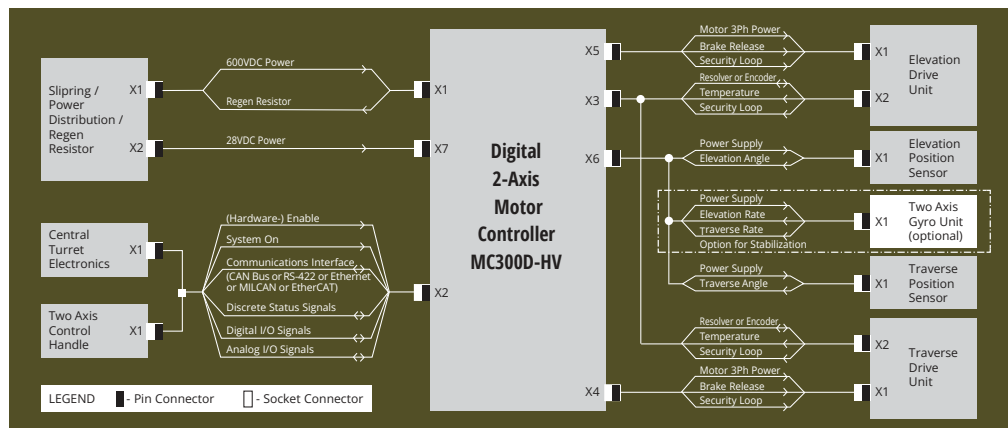

Note: All of our products are flexible and customizable to meet your specific needs. Please contact us for more information.




MC300D-HV DIGITAL 2-AXIS BRUSHLESS MOTOR CONTROLLER

PERFORMANCE

Features	Specifications
Power supply (control electronics)	18VDC – 32VDC (per Mil-Std-1275)
Power supply (motors)	700VDC maximum
Temperature (ambient)	-40 °C to 65 °C (-40 °F to 149 °F)
Environmental specification	Complies with Mil-Std-810
Command communication interfaces	CAN-BUS or RS-422 or Ethernet or MILCAN or EtherCAT
EMC specification	Complies with Mil-Std-461
Weight	36 kg (79.2 lbs)
Position sensor interface	SSI or EnDat Serial Interface
Motor commutation sensor	Resolver or encoder
Envelope	451 mm x 400 mm x 197 mm (17.8" x 15.7" x 7.8")
Self protection	Over-temperature and over-current
Output current (for each axis)	150 A peak
Option: Stabilization kit	2-Axis gyro interface

ARCHITECTURAL AND DIMENSIONAL DRAWING

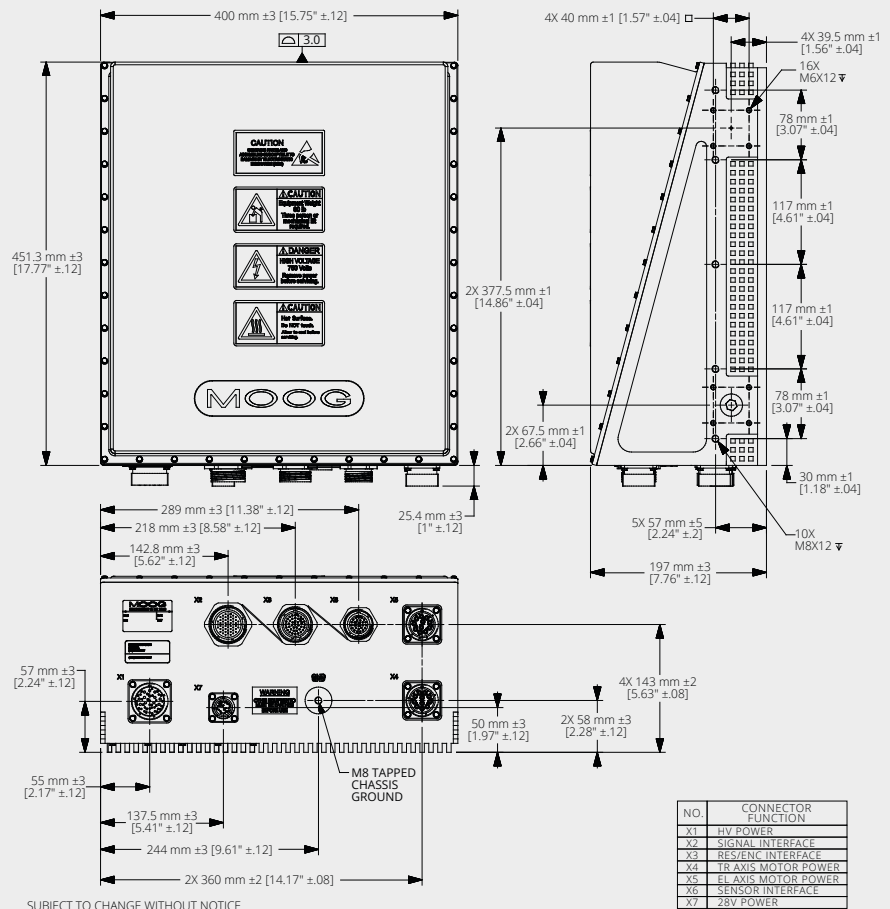

MOOG

AMERICAS
dcs@moog.com
www.moog.com/defense

AUSTRALIA
Info.australia@moog.com
www.moog.com.au

EUROPE
defenceurope@moog.com
www.moog.com/defence


Moog Space and Defense


Moog Inc.


@Moog_Inc


@Moog.Inc

Products and Solutions are subject to the export control requirements of the country in which they are manufactured and/or sold.

© 2024 Moog, Inc. All rights reserved.
Product and company names listed are trademarks or trade names of their respective companies.

Form 500-1264 0324