


## LINEAR ACTUATORS



These Linear Actuators use a ball screw to translate the rotary motion of a brushless DC motor to linear output motion. The torque transmitted to the ball screw is amplified through a helical gear transmission. Each motor is a 3-phase, multi-pole, permanent magnet, brushless DC design. Position is monitored through a linear potentiometer integrated into each of the units. The unit shown has non-jamming stops at the full extend and full-retract positions. Thermistors, heaters and thermostats could easily be incorporated into these designs.

These Linear Actuators use a ball screw to translate the rotary motion of a brushless DC motor to linear output motion. The torque transmitted to the ball screw is amplified through a helical gear transmission. Each motor is a 3-phase, multi-pole, permanent magnet, brushless DC design. Position is monitored through a linear potentiometer integrated into each of the units. The unit shown has non-jamming stops at the full extend and full-retract positions. Thermistors, heaters and thermostats could easily be incorporated into these designs.

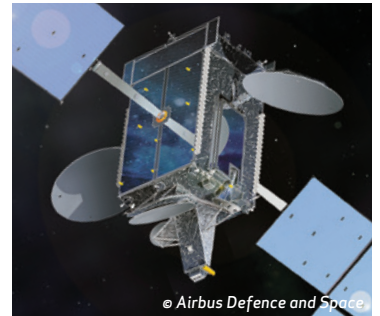

© Airbus Defence and Space



© Lockheed Martin




© Lockheed Martin

# LINEAR ACTUATORS

## STANDARD PERFORMANCE CHARACTERISTICS

Parameter

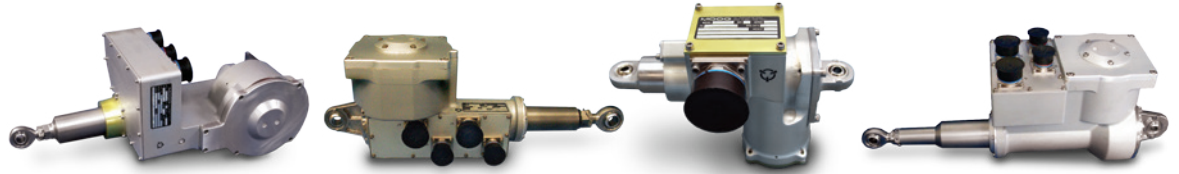

Model	Model-S	Model-R	Model-N	Model-F
Resolution (inch)	0.00047	0.00094	0.0008	0.00094
Stroke (inch)	5.50	4.64	0.870	3.675
Operating Temperature Range	-50C to 80C	-50C to 80C	-50C to 80C	-50C to 80C
Mass	16.5 lbs	18.2 lbs	3.9 lbs	18.0 lbs
Force @ Maximum Speed	3,500 lbf @ 1.10 in/sec	2,000 lbf @ 4.67 in/sec	180 lbf @ 0.540 in/sec	2,200 lbf @ 3.80 in/sec
Maximum Force	4,670 lbf @ 0.25 in/sec	5,200 lbf @ 0.47 in/sec	500 lbf @ 0.110 in/sec	3,250 lbf @ 0.89 in/sec
Maximum Backlash and Hysteresis	0.010 inch	0.010 inch	0.010 inch	0.010 inch
Maximum Current	20 A	30 A	30 A	30 A
Axial Stiffness	295,000 lb/in	295,000 lb/in	25,000 lb/in	295,000 lb/in

**MOOG**  
SPACE AND DEFENSE GROUP

21339 Nordhoff Street, Chatsworth, California 91311 USA  
+1.818.734.6700 Fax: +1.818.341.3884  
www.moog.com



linkedin.com/  
company/moog-sdg



facebook.com/  
MoogSDG.USA



twitter.com/  
MoogSDG

Equipment described herein falls under the jurisdiction of the EAR and may require US Government Authorization for export purposes. Diversion contrary to US law is prohibited.

© 2018 Moog, Inc. All rights reserved.  
Product and company names listed are trademarks or trade names of their respective companies.

Form 500-603 0618