


METEOR

ESPA-GRANDE CLASS SATELLITE BUS


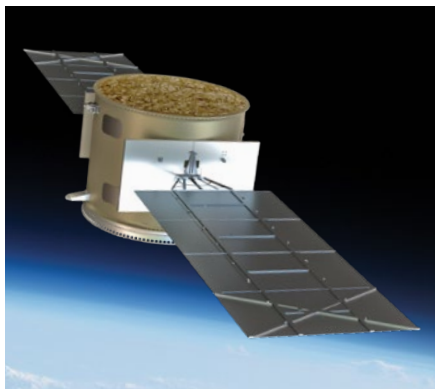


METEOR is an all-orbit capable ESPA-Grande class satellite bus used for a variety of missions and flight profiles. METEOR is ideal for pathfinder constellation missions or other disaggregated mission types. METEOR leverages the same core avionics from Moog's Space Vehicle family that have been demonstrated in missions from LEO to the Moon. The hydrazine propulsion system provides high thrust for collision avoidance

or other rapid orbit changes. The simple and robust all aluminum structure derived from Moog's ESPA provides radiation shielding and can support a range of payload configurations.

KEY FEATURES

- Avionics leveraging Moog's BRE440™ Rad-Hard CPU
- LEO up to 1200 km with 2-5 year life and can be modified for MEO, GEO and beyond
- Flexible flight software is payload and mission configurable
- High-thrust hydrazine propulsion system
- 3-Axis stabilized platform with reaction wheels and torque rods
- Single string but layered GNC sensor suite provides resiliency
- Modular power system can be expanded up to 2kW payload power
- Can be stacked or dual launch in NSSL-class launch vehicles

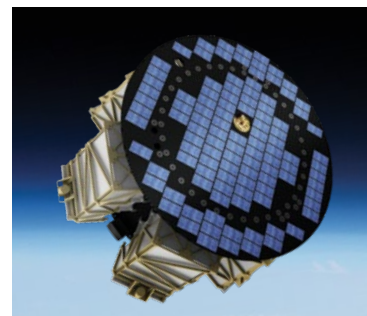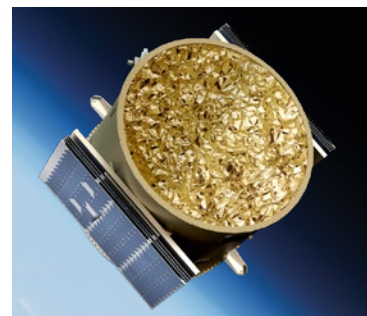

METEOR ESPA-GRANDE CLASS SATELLITE BUS

SPECIFICATIONS

Characteristic	Performance / interfaces
Orbit	500 to 1200 km
Mission Life	2-5 years (depends on orbit)
Radiation	25.5 kRad total dose with 0.200" Al shielding
Radiation Effects	Availability due to SEU of >99% over 1 year
Example Payload Power (Orbit and Mission Dependent)	~750 W OAP Payload Power 2kW Peak Power
Bus Mass	650 kg Bus Dry Mass
Bus Volume	Ø62" x 47" Tall
Orbital Position Knowledge	<4 m
Attitude Knowledge Telemetry Accuracy	<40 arc-sec (1 sigma)
Pointing Accuracy	<60 arc-sec (1 sigma)
Attitude (Pointing) Stability/Jitter	Jitter < 10 arc-sec
Velocity Accuracy	0.1 m/s
Maximum Slew Rate	>0.6 deg/s
Maximum Slew Acceleration	>0.003 deg/sec ² (point-to-point)
Delta-V	>400 m/s (with 750 kg Payload mass)
Payload Interfaces (Data)	2 x SpaceWire, 4xDiscretes, 1 x GPS 1PPS (via LVDS)
Payload Interfaces (Power)	28 [25/33] VDC Unregulated Bus Voltage (multiple 1.2 A switches)
Payload Interfaces (Mechanical)	Ø62" (Top Mounted) or Multiple 42"x46"x56" (Port/Side Mounted)
Payload Mass	750 kg or more (Top Mounted or Port/Side Mounted)

MOOG

For More Information
spacevehicles@moog.com
moog.com/space



Moog Space and Defense



Moog Inc.



@Moog_Inc



@Moog.Inc

Equipment described herein falls under the jurisdiction of the EAR and may require US Government Authorization for export purposes. Diversion contrary to US law is prohibited.

© 2025 Moog, Inc. All rights reserved.
 Product and company names listed are trademarks or trade names of their respective companies.

Form 500-1333 072925