


8-Channel Serial Data Expansion Card

Model 907-SER

Focal Technologies Corporation, a Moog Inc. company, has over 30 years of expertise in supplying standard and custom marine products for harsh environments and is a leading manufacturer of high performance and high quality multiplexers. Contact Focal for any assistance in selecting the best solution for your requirements.

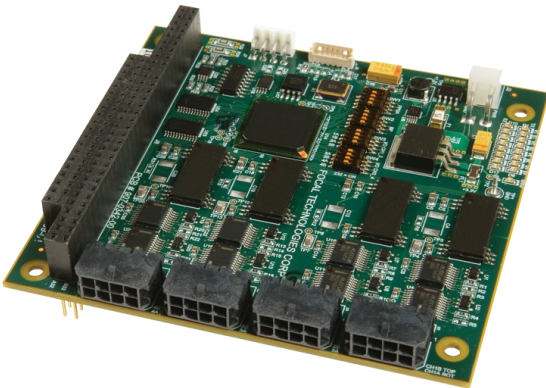

The 907-SER card is an 8-Channel RS-232/485 serial data expansion card intended for stacking on top of a 907 motherboard to add channel capacity. By default, this card is switch configured to multiplex eight data channels onto a single backplane data port (8:1) connected to a 907 motherboard. This default configuration has a maximum baud rate of 250 kbaud on each of the eight serial channels. Options include support for RS-422 configurations and higher data rates.

Power is typically drawn from the 907 motherboard via the PC/104 connector.

A 907-DIAG-E diagnostic card may be added to the same stack as the console 907 motherboard to obtain system diagnostics of both the remote and console stacks through an Ethernet interface and Graphical User Interface (GUI) software.

Features

- Electrically isolated serial data channels (in pairs)
- Switch selectable RS-232/485 interfaces for individual channels
- RS-422 and RS-485 inputs have fail-safe biasing
- Compatible with 907-DIAG-E diagnostic card and Graphical User Interface (GUI) software
- On-board diagnostic LEDs
- Compatible with 907-232 and 907-485 serial cards

Benefits

- Isolated data channels provide more robust interface to external equipment
- Simplifies troubleshooting with advanced diagnostics
- Reduces sparring requirements

Applications

- Remotely Operated Vehicles (ROVs)
- Pipe Inspection Robots
- Bomb Disposal Robots
- Tether Management Systems
- Tactical Networks

Specifications

Data	
No. Channels	8 channels of RS-232 (default), RS-485 or RS-422*
Data Rate	RS-232: 120kbaud RS-485/422: 250 kbaud (2.5 Mbaud option)
Options	Factory configure RS-422 2.5 Mbaud on four channels: 4 backplane lines 400 kbaud on eight channels: 2 backplane lines Standalone serial copper mux Installed 120 Ohm terminators
Mechanical	
Dimensions	PC/104 (form-factor only)
Weight	< 120 g (0.26 lb)

*Factory Configured Option

Electrical	
Power Voltage	+5.0 VDC \pm 10%, regulated
Power Current	0.75 A typical (1.5 A max)
Connectors	
Data I/O	4 x 8-pin Molex (Micro-fit Series)
Power	Via PC/104 connector Optional: 2-pin Molex (KK series)
Environmental	
Temperature	-10°C to +60°C (operational) -40°C to +85°C (storage)
Humidity	85% RH, non-condensing
Vibration	5 g, 25 - 1000 Hz, 3 axes
Shock	30 g, 11 ms, half-sine, 3 axes
Options	6000 psi pressure tolerant, extended temperature, stress screened or qualified

All specifications and information are subject to change without notice. Please contact Focal for the latest updates.

© 2017 Moog Inc. DS907SER-v1.0